




DIN 2566 ROSCADA PN16

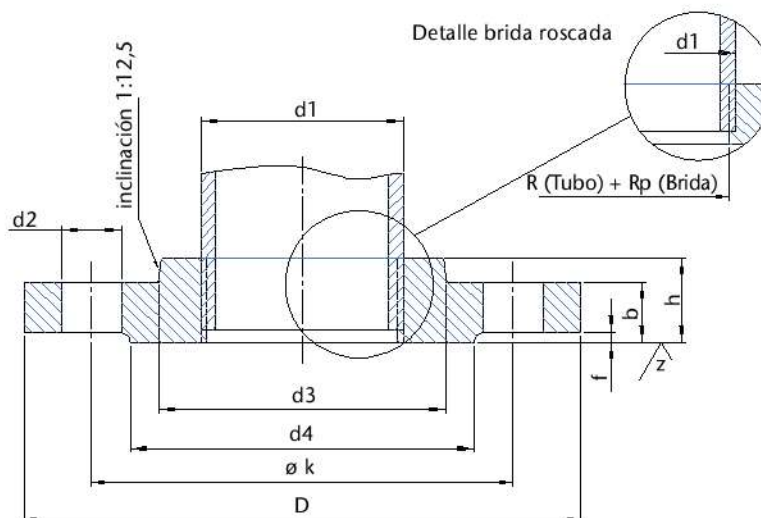

PN	CÓDIGOS		TUBO ROSCADO				BRIDA ROSCADA				CUELLO	Cara (Reborde)			Tornillos			aprox. Kg pieza
			DN	Medida	d1	Rosca cónica (R) según DIN 2999-1 / ISO 7-1 / EN 10226-1	Rosca cilíndrica (Rp) según DIN 2999-1 / ISO 7-1 / EN 10226-1	D	b	k	h	d3	d4	f	no.	Métrica	d2	
PN 16	F5660015	F566G015	15	1/2"	21,3	R 1/2"	Rp 1/2"	95	14	65	20	35	45	2	4	M12	14	0,61
	F5660020	F566G020	20	3/4"	26,9	R 3/4"	Rp 3/4"	105	16	75	24	45	58	2	4	M12	14	0,91
	F5660025	F566G025	25	1"	33,7	R 1"	Rp 1"	115	16	85	24	52	68	2	4	M12	14	1,10
	F5660032	F566G032	32	1 1/4"	42,4	R 1 1/4"	Rp 1 1/4"	140	16	100	26	60	78	2	4	M16	18	1,60
	F5660040	F566G040	40	1 1/2"	48,3	R 1 1/2"	Rp 1 1/2"	150	16	110	26	70	88	3	4	M16	18	1,78
	F5660050	F566G050	50	2"	60,3	R 2"	Rp 2"	165	18	125	28	85	102	3	4	M16	18	2,43
	F5660065	F566G065	65	2 1/2"	76,1	R 2 1/2"	Rp 2 1/2"	185	18	145	32	105	122	3	4	M16	18	3,18
	F5660080	F566G080	80	3"	88,9	R 3"	Rp 3"	200	20	160	34	118	138	3	8	M16	18	4,12
	F5660100	F566G100	100	4"	114,3	R 4"	Rp 4"	220	20	180	38	140	158	3	8	M16	18	4,47
	F5660125	F566G125	125	5"	139,7	R 5"	Rp 5"	250	22	210	40	168	188	3	8	M16	18	6,13
	F5660150	F566G150	150	6"	168,3	R 6"	Rp 6"	285	22	240	44	195	212	3	8	M20	22	7,92

G => producto galvanizado

