




DIN 2576 ROSCADA PN10/16



PN	CÓDIGOS	TUBO ROSCADO				BRIDA ROSCADA					Tornillos			aprox. Kg pieza
		DN	Medida	d1	Rosca cónica (R) según DIN 2999-1 / ISO 7-1 / EN 10226-1	Rosca cilíndrica (Rp) según DIN 2999-1 / ISO 7-1 / EN 10226-1	d5	D	b1	k	no.	Métrica	d2	
PN 16	F576O015	15	1/2"	21,3	R 1/2"	Rp 1/2"	22,0	95	14	65	4	M12	14	0,67
	F576O020	20	3/4"	26,9	R 3/4"	Rp 3/4"	27,6	105	16	75	4	M12	14	0,94
	F576O025	25	1"	33,7	R 1"	Rp 1"	34,4	115	16	85	4	M12	14	1,11
	F576O032	32	1 1/4"	42,4	R 1 1/4"	Rp 1 1/4"	43,1	140	16	100	4	M16	18	1,62
	F576O040	40	1 1/2"	48,3	R 1 1/2"	Rp 1 1/2"	49,0	150	16	110	4	M16	18	1,86
	F576O050	50	2"	60,3	R 2"	Rp 2"	61,1	165	18	125	4	M16	18	2,47
	F576O065	65	2 1/2"	76,1	R 2 1/2"	Rp 2 1/2"	77,1	185	18	145	4	M16	18	3,00
PN 10	F576O080	80	3"	88,9	R 3"	Rp 3"	90,3	200	20	160	4	M16	18	3,79
PN 16	F576O086	80	3"	88,9	R 3"	Rp 3"	90,3	200	20	160	8	M16	18	3,79
PN 16	F576O100	100	4"	114,3	R 4"	Rp 4"	115,9	220	20	180	8	M16	18	4,03
	F576O125	125	5"	139,7	R 5"	Rp 5"	141,6	250	22	210	8	M16	18	5,46
	F576O150	150	6"	168,3	R 6"	Rp 6"	170,5	285	22	240	8	M20	22	6,57

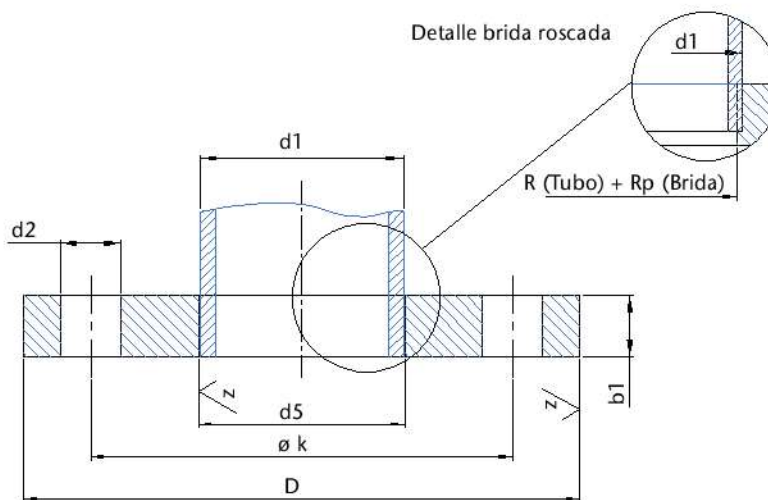