


**DIN 2634 PN25 ; DIN 2635 PN40**

PN	CÓDIGOS	TUBO			BRIDAS				CUELLO				Cara (Reborde)		Tornillos			aprox. Kg pieza
		DN	Medida	a	D	b	k	h	m	s	h2	r	g	f	no.	Métrica	L	
PN 40	F2635015	15	1/2"	21,3	95	16	65	38	32	2	6	4	45	2	4	M12	14	0,75
	F2635020	20	3/4"	26,9	105	18	75	40	40	2,3	6	4	58	2	4	M12	14	1,06
	F2635025	25	1"	33,7	115	18	85	40	46	2,6	6	4	68	2	4	M12	14	1,29
	F2635032	32	1 1/4"	42,4	140	18	100	42	56	2,6	6	6	78	2	4	M16	18	1,88
	F2635040	40	1 1/2"	48,3	150	18	110	45	64	2,6	7	6	88	3	4	M16	18	2,33
	F2635050	50	2"	60,3	165	20	125	48	75	2,9	8	6	102	3	4	M16	18	2,82
	F2635065	65	2 1/2"	76,1	185	22	145	52	90	2,9	10	6	122	3	8	M16	18	3,74
	F2635080	80	3"	88,9	200	24	160	58	105	3,2	12	8	138	3	8	M16	18	4,75
	F2635100	100	4"	114,3	235	24	190	65	134	3,6	12	8	162	3	8	M20	22	6,52
	F2635125	125	5"	139,7	270	26	220	68	162	4	12	8	188	3	8	M24	26	9,07
PN 25	F2635150	150	5"	168,3	300	28	250	75	192	4,5	12	10	218	3	8	M24	26	11,80
PN 25	F2634200	200	6"	219,1	360	30	310	80	244	6,3	16	10	278	3	12	M24	26	17,00
PN 40	F2635200	200	8"	219,1	375	34	320	88	244	6,3	16	10	285	3	12	M27	30	21,50
PN 25	F2634250	250	10"	273,0	425	32	370	88	298	7,1	18	12	335	3	12	M27	30	24,40
PN 40	F2635250	250	10"	273,0	450	38	385	105	306	7,1	18	12	345	3	12	M30	33	34,90
PN 25	F2634300	300	12"	323,9	485	34	430	92	352	8	18	12	395	4	16	M27	30	31,20
PN 40	F2635300	300	12"	323,9	515	42	450	115	362	8	18	12	410	4	16	M30	33	49,70
PN 25	F2634350	350	14"	355,6	555	38	490	100	398	8	20	12	450	4	16	M30	33	47,20
PN 40	F2635350	350	14"	355,6	580	46	510	125	408	8,8	20	12	465	4	16	M33	36	68,10
PN 25	F2634400	400	16"	406,4	620	40	550	110	452	8,8	20	12	505	4	16	M33	36	61,70
PN 40	F2635400	400	16"	406,4	660	50	585	135	462	11	20	12	535	4	16	M36	39	96,50
PN 25	F2634500	500	20"	508,0	730	44	660	125	558	10	20	12	615	4	20	M33	36	89,60
PN 40	F2635500	500	20"	508,0	755	52	670	140	562	14,2	20	12	615	4	20	M39	42	117,00

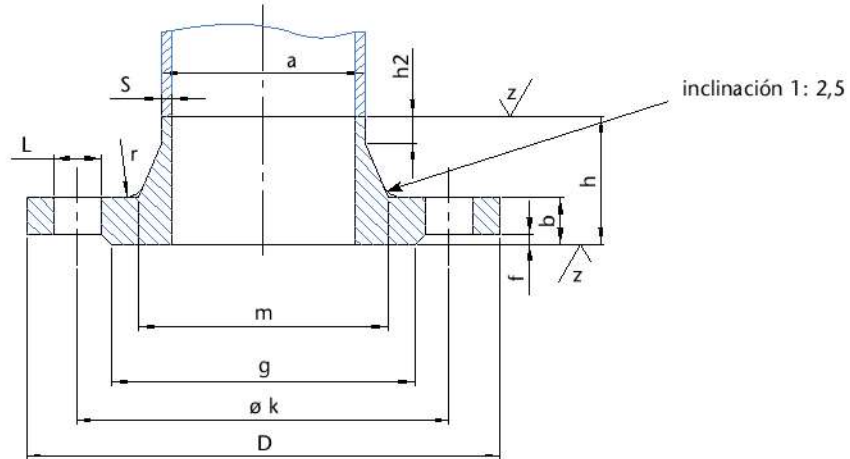