




EN 1092-1 ROSCADA tipo 13 PN6/16/40



PN	CÓDIGOS	TUBO ROSCADO				BRIDA ROSCADA						CUELLO	Cara (Reborde)		Tornillos			aprox. Kg pieza
		DN	Medida	P	Rosca cónica (R) según DIN 2999-1 / ISO 7-1 / EN 10226-1	Rosca cilíndrica (Rp) según DIN 2999-1 / ISO 7-1 / EN 10226-1	D	C2	K	H1	R1	N2	d1	f1	Nr.	Métrica	L	
PN 6	FC130015	15	1/2"	21,3	R 1/2"	Rp 1/2"	80	12	55	20	4	30	40	2	4	M10	11	0,37
PN 40	FC134015	15	1/2"	21,3	R 1/2"	Rp 1/2"	95	16	65	22	4	35	45	2	4	M12	14	0,72
PN 6	FC130020	20	3/4"	26,9	R 3/4"	Rp 3/4"	90	14	65	24	4	40	50	2	4	M10	11	0,58
PN 40	FC134020	20	3/4"	26,9	R 3/4"	Rp 3/4"	105	18	75	26	4	45	58	2	4	M12	14	1,04
PN 6	FC130025	25	1"	33,7	R 1"	Rp 1"	100	14	75	24	4	50	60	2	4	M10	11	0,73
PN 40	FC134025	25	1"	33,7	R 1"	Rp 1"	115	18	85	28	4	52	68	2	4	M12	14	1,25
PN 6	FC130032	32	1 1/4"	42,4	R 1 1/4"	Rp 1 1/4"	120	14	90	26	6	60	70	2	4	M12	14	1,04
PN 40	FC134032	32	1 1/4"	42,4	R 1 1/4"	Rp 1 1/4"	140	18	100	30	6	60	78	2	4	M16	18	1,81
PN 6	FC130040	40	1 1/2"	48,3	R 1 1/2"	Rp 1 1/2"	130	14	100	26	6	70	80	3	4	M12	14	1,20
PN 40	FC134040	40	1 1/2"	48,3	R 1 1/2"	Rp 1 1/2"	150	18	110	32	6	70	88	3	4	M16	18	2,06
PN 6	FC130050	50	2"	60,3	R 2"	Rp 2"	140	14	110	28	6	80	90	3	4	M12	14	1,34
PN 16	FC136050	50	2"	60,3	R 2"	Rp 2"	165	18	125	32	6	84	102	3	4	M16	18	2,39
PN 6	FC130065	65	2 1/2"	76,1	R 2 1/2"	Rp 2 1/2"	160	14	130	32	6	100	110	3	4	M12	14	1,83
PN 16	FC136065	65	2 1/2"	76,1	R 2 1/2"	Rp 2 1/2"	185	18	145	32	6	104	122	3	8	M16	18	2,97
PN 6	FC130080	80	3"	88,9	R 3"	Rp 3"	190	16	150	34	8	110	128	3	4	M16	18	2,75
PN 16	FC136080	80	3"	88,9	R 3"	Rp 3"	200	20	160	34	6	118	138	3	8	M16	18	3,78
PN 6	FC130100	100	4"	114,3	R 4"	Rp 4"	210	16	170	40	8	130	148	3	4	M16	18	3,01
PN 16	FC136100	100	4"	114,3	R 4"	Rp 4"	220	20	180	40	8	140	158	3	8	M16	18	4,38
PN 16	FC136125	125	5"	139,7	R 5"	Rp 5"	250	22	210	44	8	168	188	3	8	M16	18	6,57
PN 16	FC136150	150	6"	168,3	R 6"	Rp 6"	285	22	240	44	10	195	218	3	8	M20	22	7,24

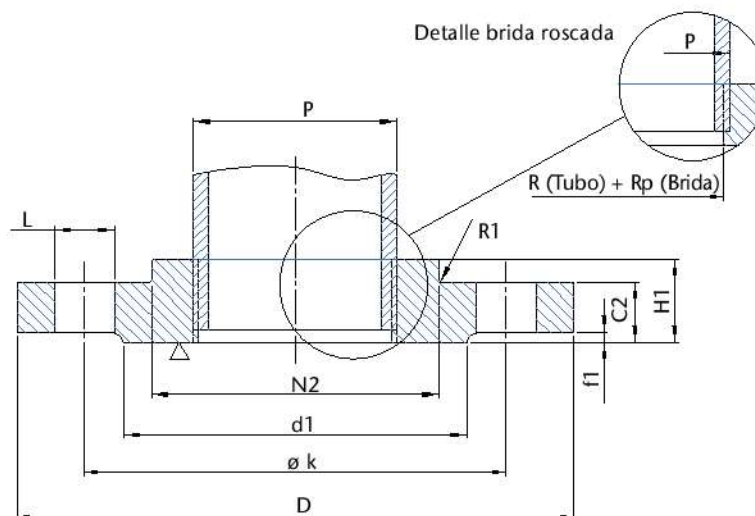