




ASME B16.5 CLASE 150 (Slip-On Welding)

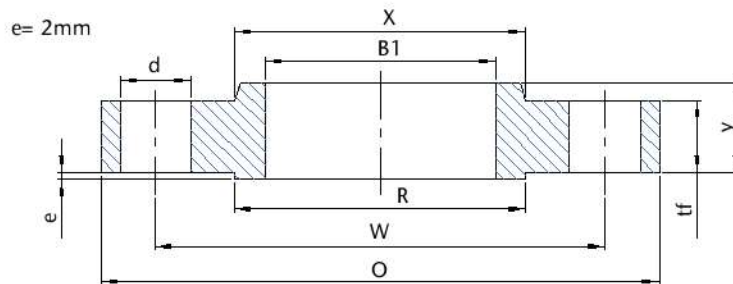

CÓDIGOS	Designación			BRIDAS									TORNILLOS		aprox. Kg/pieza
	Clase	Diámetro Nominal		Diámetro exterior	Distancia entre taladros	Asiento	Mínimo espesor	Altura	Diámetro interior	Diámetro del cuello	Diámetro para tornillo		Num.	Diám.	
		DN	NPS								O	W			
FO150015	CLASE 150	15	1/2"	90	60,3	34,9	9,6	14	22,2	30	5/8"	15,88	4	1/2"	0,40
FO150020		20	3/4"	100	69,9	42,9	11,2	14	27,7	38	5/8"	15,88	4	1/2"	0,70
FO150025		25	1"	110	79,4	50,8	12,7	16	34,5	49	5/8"	15,88	4	1/2"	0,80
FO150032		32	1 1/4"	115	88,9	63,5	14,3	19	43,2	59	5/8"	15,88	4	1/2"	1,10
FO150040		40	1 1/2"	125	98,4	73,0	15,9	21	49,5	65	5/8"	15,88	4	1/2"	1,40
FO150050		50	2"	150	120,7	92,1	17,5	24	61,9	78	3/4"	19,05	4	5/8"	2,20
FO150065		65	2 1/2"	180	139,7	104,8	20,7	27	74,6	90	3/4"	19,05	4	5/8"	3,60
FO150080		80	3"	190	152,4	127,0	22,3	29	90,7	108	3/4"	19,05	4	5/8"	4,10
FO150100		100	4"	230	190,5	157,2	22,3	32	116,1	135	3/4"	19,05	8	5/8"	5,60
FO150125		125	5"	255	215,9	185,7	22,3	35	143,8	164	7/8"	22,23	8	3/4"	6,30
FO150150		150	6"	280	241,3	215,9	23,9	38	170,7	192	7/8"	22,23	8	3/4"	7,50
FO150200		200	8"	345	298,5	269,9	27,0	43	221,5	246	7/8"	22,23	8	3/4"	12,60
FO150250		250	10"	405	362,0	323,8	28,6	48	276,2	305	1"	25,40	12	7/8"	18,50
FO150300		300	12"	485	431,8	381,0	30,2	54	327,0	365	1"	25,40	12	7/8"	28,00
FO150350		350	14"	535	476,3	412,8	33,4	56	359,2	400	1 1/8"	28,58	12	1"	36,00
FO150400		400	16"	595	539,8	469,9	35,0	62	410,5	457	1 1/8"	28,58	16	1"	46,00
FO150450		450	18"	635	577,9	533,4	38,1	67	461,8	505	1 1/4"	31,75	16	1 1/8"	50,00
FO150500	500	20"	700	635,0	584,2	41,3	71	513,1	559	1 1/4"	31,75	20	1 1/8"	64,00	
FO150600	600	24"	815	749,3	692,2	46,1	81	616,0	663	1 3/8"	34,92	20	1 1/4"	92,82	

Notas:

B1: corresponde al diámetro exterior aumentado del tubo de acero según ASME B36.10M. Tener presente que:

NPS ≤10: espesor tubo (STD) - (schedule 40) -

NPS > 10: espesor tubo 9.53 mm

