




ASME B16.5 CLASE 300 (Slip-On Welding)

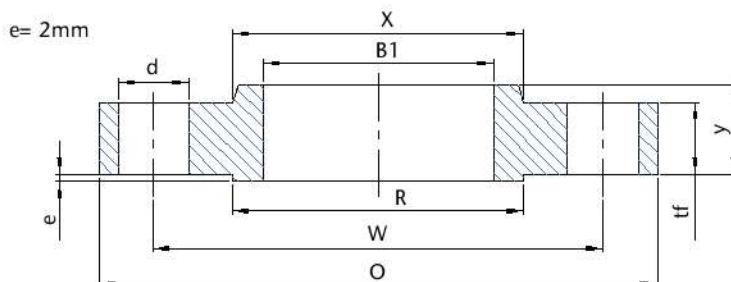

CÓDIGOS	Designación			BRIDAS								TORNILLOS		aprox. Kg/pieza	
	Clase	Diámetro Nominal		Diámetro exterior	Distancia entre taladros	Asiento	Mínimo espesor	Altura	Diámetro interior	Diámetro del cuello	Diámetro para tornillo		Num.		Diám.
											pulg.	mm			
		DN	NPS								O	W			
FO300015	CLASE 300	15	1/2"	95	66,7	34,9	12,7	21	22,2	38	5/8"	15,88	4	1/2"	0,70
FO300020		20	3/4"	115	82,6	42,9	14,3	24	27,7	48	3/4"	19,05	4	5/8"	1,10
FO300025		25	1"	125	88,9	50,8	15,9	25	34,5	54	3/4"	19,05	4	5/8"	1,40
FO300032		32	1 1/4"	135	98,4	63,5	17,5	25	43,2	64	3/4"	19,05	4	5/8"	1,80
FO300040		40	1 1/2"	155	114,3	73,0	19,1	29	49,5	70	7/8"	22,23	4	3/4"	2,60
FO300050		50	2"	165	127,0	92,1	20,7	32	61,9	84	3/4"	19,05	8	5/8"	3,40
FO300065		65	2 1/2"	190	149,2	104,8	23,9	37	74,6	100	7/8"	22,23	8	3/4"	4,40
FO300080		80	3"	210	168,3	127,0	27,0	41	90,7	117	7/8"	22,23	8	3/4"	6,10
FO300100		100	4"	255	200,0	157,2	30,2	46	116,1	146	7/8"	22,23	8	3/4"	10,10
FO300125		125	5"	280	235,0	185,7	33,4	49	143,8	178	7/8"	22,23	8	3/4"	12,50
FO300150		150	6"	320	269,9	215,9	35,0	51	170,7	206	7/8"	22,23	12	3/4"	16,20
FO300200		200	8"	380	330,2	269,9	39,7	60	221,5	260	1"	25,40	12	7/8"	24,80
FO300250		250	10"	445	387,4	323,8	46,1	65	276,2	321	1 1/8"	28,58	16	1"	37,10
FO300300		300	12"	520	450,8	381,0	49,3	71	327,0	375	1 1/4"	31,75	16	1 1/8"	50,00
FO300350		350	14"	585	514,4	412,8	52,4	75	359,2	425	1 1/4"	31,75	20	1 1/8"	70,00
FO300400		400	16"	650	571,5	469,9	55,6	81	410,5	483	1 3/8"	34,92	20	1 1/4"	97,00
FO300450		450	18"	710	628,6	533,4	58,8	87	461,8	533	1 3/8"	34,92	24	1 1/4"	123,00
FO300500		500	20"	775	685,8	584,2	62,0	94	513,1	587	1 3/8"	34,92	24	1 1/4"	133,00
FO300600		600	24"	915	812,8	692,2	68,3	105	616,0	702	1 5/8"	41,27	24	1 1/2"	201,00

Notas:

B1: corresponde al diámetro exterior aumentado del tubo de acero según ASME B36.10M. Tener presente que:

NPS ≤10: espesor tubo (STD) - (schedule 40) -

NPS > 10: espesor tubo 9.53 mm

