




DIN 2573 ROSCADA PN6



| PN   | CÓDIGOS  | TUBO ROSCADO |        |       |                                                                | BRIDA ROSCADA                                                       |       |     |    |     | Tornillos |         |    | aprox. Kg<br>pieza |
|------|----------|--------------|--------|-------|----------------------------------------------------------------|---------------------------------------------------------------------|-------|-----|----|-----|-----------|---------|----|--------------------|
|      |          | DN           | Medida | d1    | Rosca cónica (R)<br>según DIN 2999-1 /<br>ISO 7-1 / EN 10226-1 | Rosca cilíndrica (Rp)<br>según DIN 2999-1 /<br>ISO 7-1 / EN 10226-1 | d5    | D   | b1 | k   | no.       | Métrica | d2 |                    |
| PN 6 | F573O015 | 15           | 1/2"   | 21,3  | R 1/2"                                                         | Rp 1/2"                                                             | 22,0  | 80  | 12 | 55  | 4         | M10     | 11 | 0,41               |
|      | F573O020 | 20           | 3/4"   | 26,9  | R 3/4"                                                         | Rp 3/4"                                                             | 27,6  | 90  | 14 | 65  | 4         | M10     | 11 | 0,60               |
|      | F573O025 | 25           | 1"     | 33,7  | R 1"                                                           | Rp 1"                                                               | 34,4  | 100 | 14 | 75  | 4         | M10     | 11 | 0,74               |
|      | F573O032 | 32           | 1 1/4" | 42,4  | R 1 1/4"                                                       | Rp 1 1/4"                                                           | 43,1  | 120 | 16 | 90  | 4         | M12     | 14 | 1,19               |
|      | F573O040 | 40           | 1 1/2" | 48,3  | R 1 1/2"                                                       | Rp 1 1/2"                                                           | 49,0  | 130 | 16 | 100 | 4         | M12     | 14 | 1,39               |
|      | F573O050 | 50           | 2"     | 60,3  | R 2"                                                           | Rp 2"                                                               | 61,1  | 140 | 16 | 110 | 4         | M12     | 14 | 1,53               |
|      | F573O065 | 65           | 2 1/2" | 76,1  | R 2 1/2"                                                       | Rp 2 1/2"                                                           | 77,1  | 160 | 16 | 130 | 4         | M12     | 14 | 1,89               |
|      | F573O080 | 80           | 3"     | 88,9  | R 3"                                                           | Rp 3"                                                               | 90,3  | 190 | 18 | 150 | 4         | M16     | 18 | 2,98               |
|      | F573O100 | 100          | 4"     | 114,3 | R 4"                                                           | Rp 4"                                                               | 115,9 | 210 | 18 | 170 | 4         | M16     | 18 | 3,46               |
|      | F573O125 | 125          | 5"     | 139,7 | R 5"                                                           | Rp 5"                                                               | 141,6 | 240 | 20 | 200 | 8         | M16     | 18 | 4,60               |
|      | F573O150 | 150          | 6"     | 168,3 | R 6"                                                           | Rp 6"                                                               | 170,5 | 265 | 20 | 225 | 8         | M16     | 18 | 5,22               |

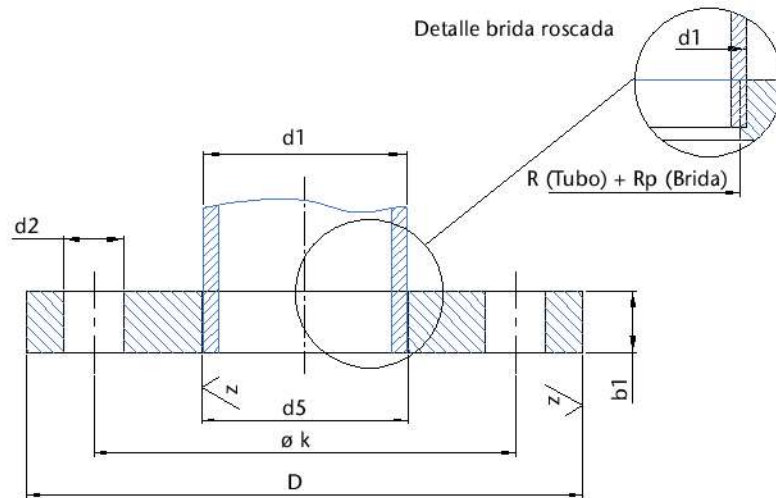