



LEHENGOAK, S.A.



Protective covers

FASTER® protective covers have been especially designed in order to protect quick-release couplings from dirt contamination and atmosferic agents. The new special PRO T protection completely covers the coupling when the environment is particularly dusty or weather conditions can damage some components.


When the coupling is disconnected it is possible to glide the PRO T cover along the hose and protect only one part simply by closing the cover with the special string. The PRO P cover is used to protect the single parts of the disconnected coupling.

of the disconnected coupling,

PRO	series

Partial protection	A [mm.]	Size	Ø D [mm.]	Total protection	B [mm.]
PRO P 48	100	06	48	PRO T 48	200
PRO P 58	115	08	58	PRO T 58	235
PRO P 68	135	12	68	PRO T 68	270
PRO P 86	155	16	86	PRO T 86	305
PRO P 105	175	24	105	PRO T 105	340



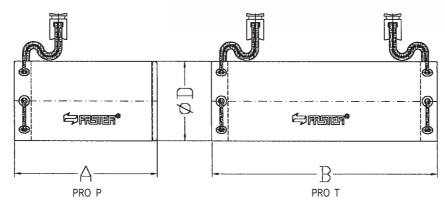

► Aluminium protection

Series	Size		Cap for male	Plug for female	
3FFV 38	06	3/8"	TF 3FV 38 S	TM 3FV 38 S	
3FFV 12	08	1/2"	TF 3FV 12 S	TM 3FV 12 S	
3FFV 34	12	3/4"	TF 3FV 34 S	TM 3FV 34 S	
3FFV 1	16	1"	TF 3FV 1 S	TM 3FV 1 S	
3FFV 112	24	1 1/2"	TF 3FV 112 S	TM 3FV 112 S	

