
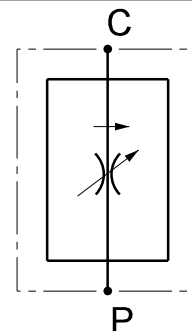


Valvola regolatrice di flusso compensata a due vie a cartuccia Two ways, pressure compensated, flow regulator valve - cartridge type


mod. **RF220-C**

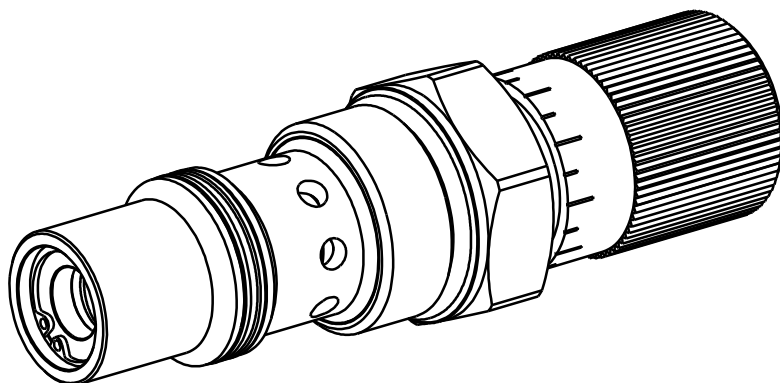

Schema idraulico
Hydraulic scheme

Portata massima Max inflow	200 l/min
Portata regolata Max regulated flow	200 l/min
Pressione massima Max pressure	350 bar
Dati ottenuti usando olio con viscosità 30 cSt a 50°C. Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C.	
Viscosità consigliate Recommended viscosity	10-420 cSt
Temperatura di lavoro Working temperature	-20/+90°C
Filtrazione Filtration	25 µ

Codice Code	Regolazioni Adjustments
A	Ch.4 Ch.18 max. 55 Vite esterna con esagono incassato Leakproof hex. socket screw
	max. 80 Ø 40 Manopola Handknob

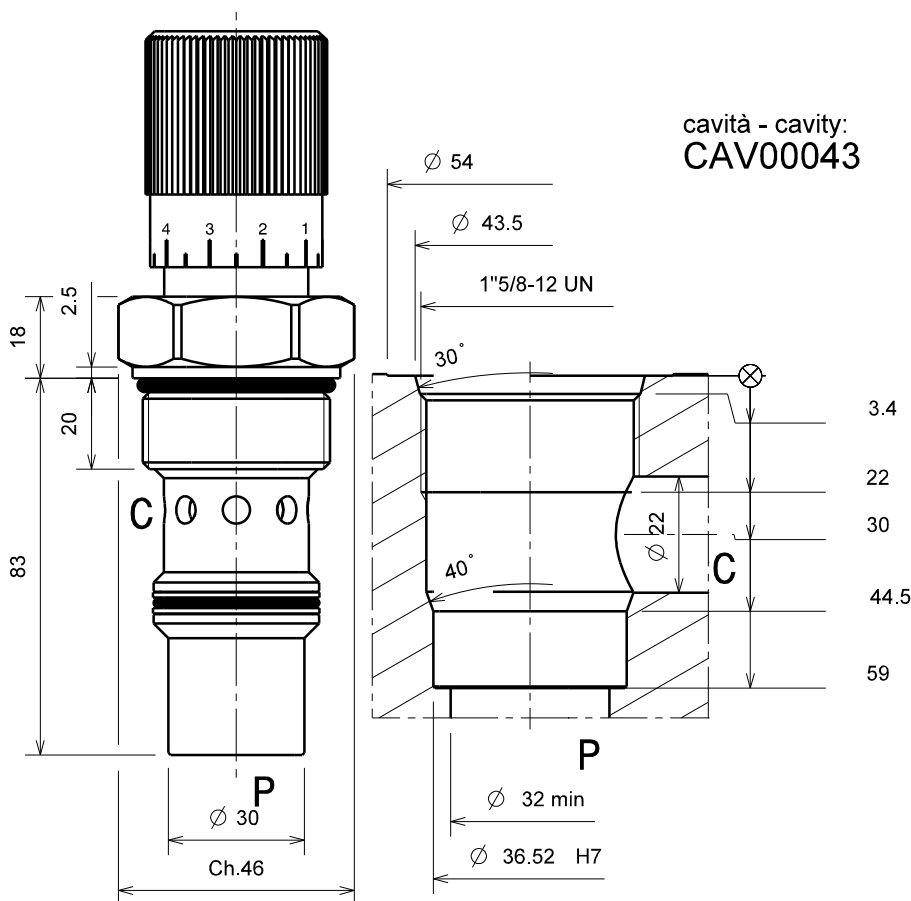

Sigla di ordinazione / Ordering code

RF220-C - A

Modello / Type

Regolazione
Adjustment

A
B

I dati non sono impegnativi, CBF si riserva di apportare modifiche senza preavviso.
The specifications are not binding, CBF reserves the right to introduce modifications without notice.