




Air/oil coolers series CSA 6

Code	Tension V	Frequency Hz	Rpm	Power kW	Dia.Fan Weel.	dB (A)	K mm.
CSA 6.12.0.00	12	DC	2300	0.125+0.125	305+305	78	210
CSA 6.24.0.00	24	DC	2300	0.125+0.125	305+305	78	210
CSA 6.38.0.00	230/400	50/60	1390	0.75	500	77	360
CSA 6.G2.0.00			800/2500	=		=	390

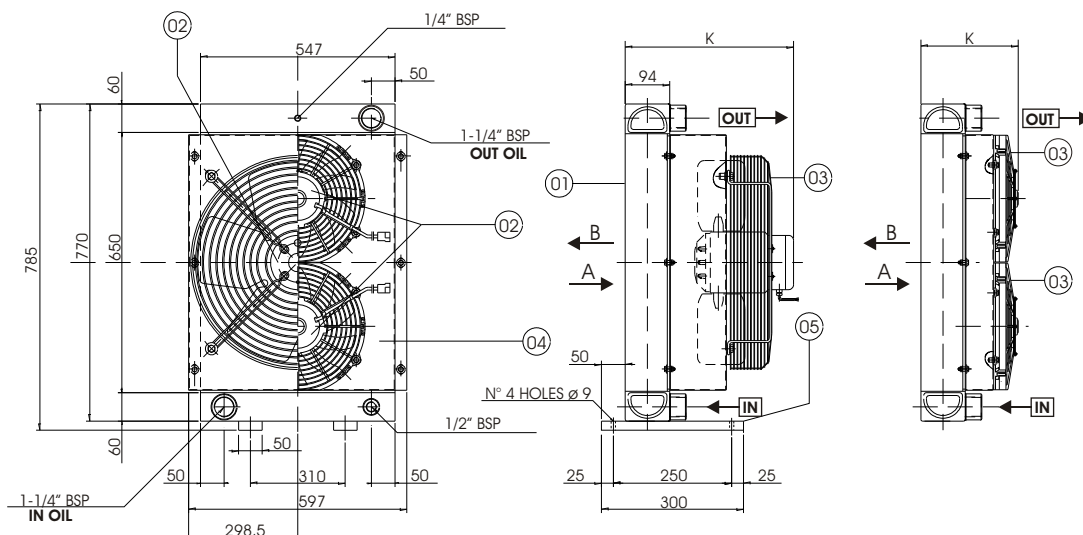

COOLER TECHNICAL DATA		FAN MOTORS TECHNICAL DATA	
Max working Pressure	:20 bar	Tension	CA: DIN IEC38 DC: 12/24V
Max working Temperature	: + 120° C	Max Working Temperature	: + 75° C + 75° C
Max oil Viscosity	: 100 CST	Min Working Temperature	: - 30° C
Main Material	: Alluminium	Main Material	: Steel : Fiber Glass
Cooling Fluid	: Compatible Al	Motor Protection	: IP 44 : IP 64
Colour	: Black	Colour	: Black


SPARE PARTS

Pos.	Description	Code	Pos.	Description	Code
CSA 6.12.0.00			CSA 6.24.0.00		
01	Cooler	CSA6.00.0.00	01	Cooler	CSA6.00.0.00
02	Fan Motor(Air Flow Suction)	10.70108 .1	02	Fan Motor(Fan Motor Suction)	10.70109 .1
02	Fan Motor(Air Flow Blowing)	10.70110 .1	02	Fan Motor(Fan Motor Blowing)	10.70111 .1
04	Cowl	15.65012 .0	04	Cowl	15.65012 .0
CSA 6.38.0.00			CSA 6 .G2.0.00		
01	Cooler	CSA6.00.0.00	01	Cooler	CSA6.00.0.00
02	Fan Motor(Air Flow Suction)	10.70019 .1	02	Fan Motor(Air Flow Suction)	11.70036 .1
02	Fan Motor(Air Flow Blowing)	10.70020 .1	02	Fan Motor(Air Flow Blowing)	11.70176 .1
04	Cowl	15.65013 .0	03	Safety Guard	09.70059 .1
			04	Cowl	15.65013 .0







THERMIC EFFICIENCY

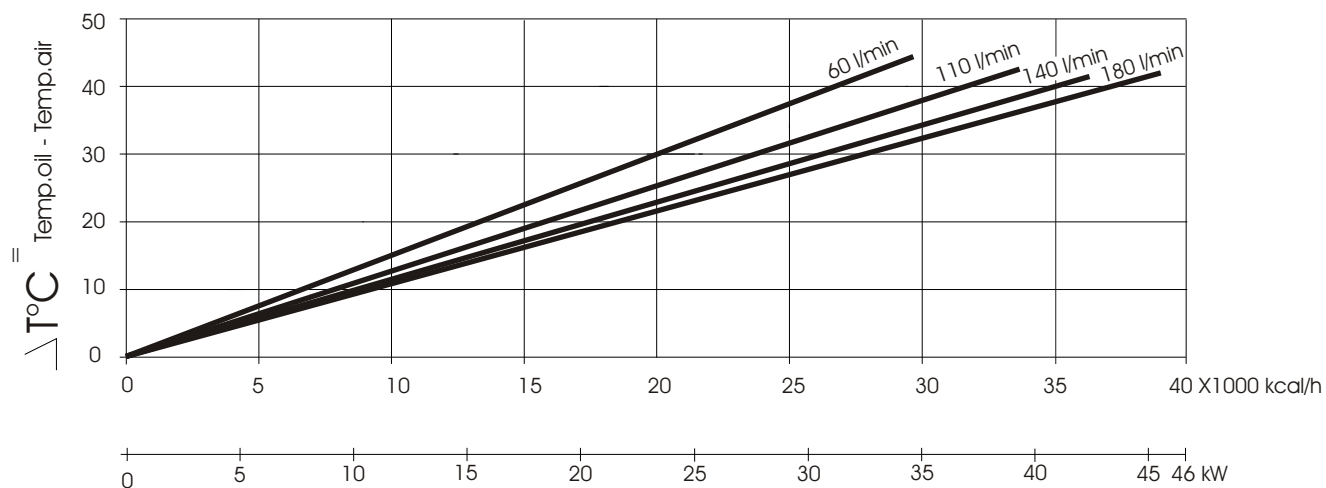

PRESSURE DROP

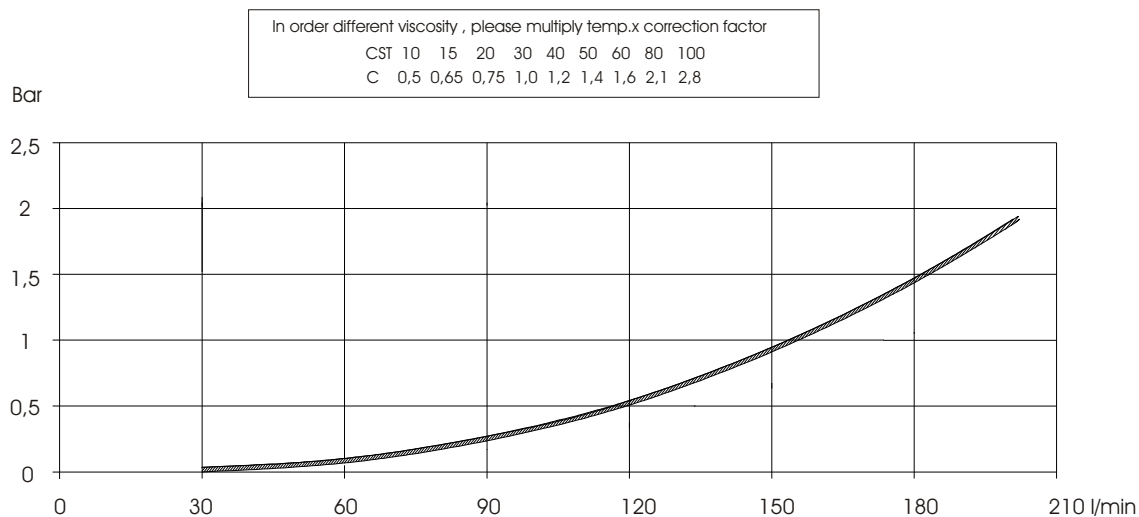

CODIFICATION

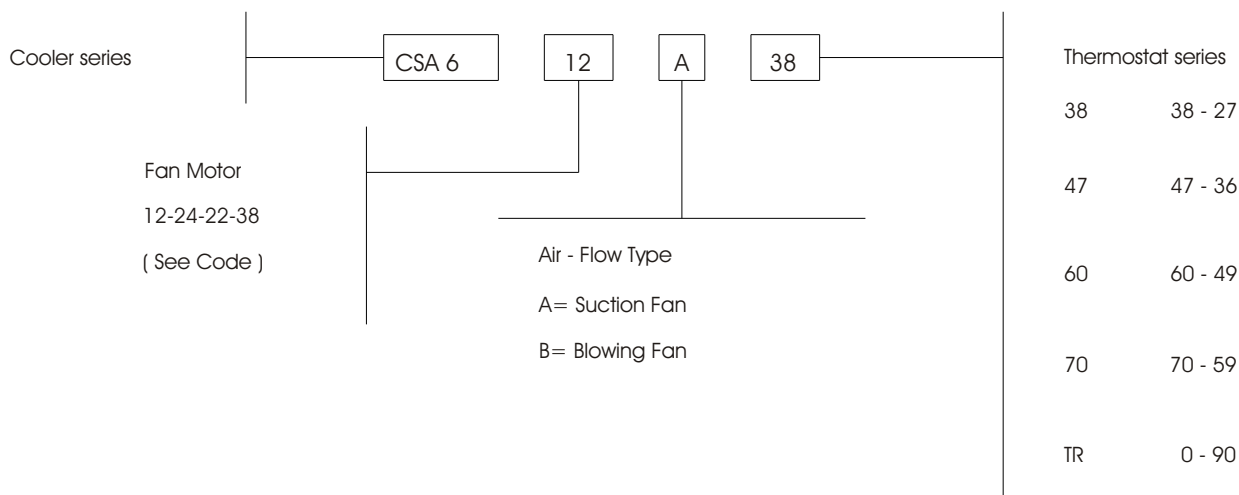

Technical characteristic herein mentioned are not binding and it can be modified from CIESSE without any notice

