


Code	Tension V	Frequency Hz	Rpm	Power Kw	Dia.Fan Weel.	dB (A)	K mm.
CSA 8.38.0.00	230/400	50	900	0.57	630	78	430
CSA 8.G2.0.00	Prep. For Gr2 Hydraulic motor		900/2000	=	630	=	340
CSA 8.GD.0.00	Prep. For Danfoss Hydr. motor		800/1500	=	630	=	340

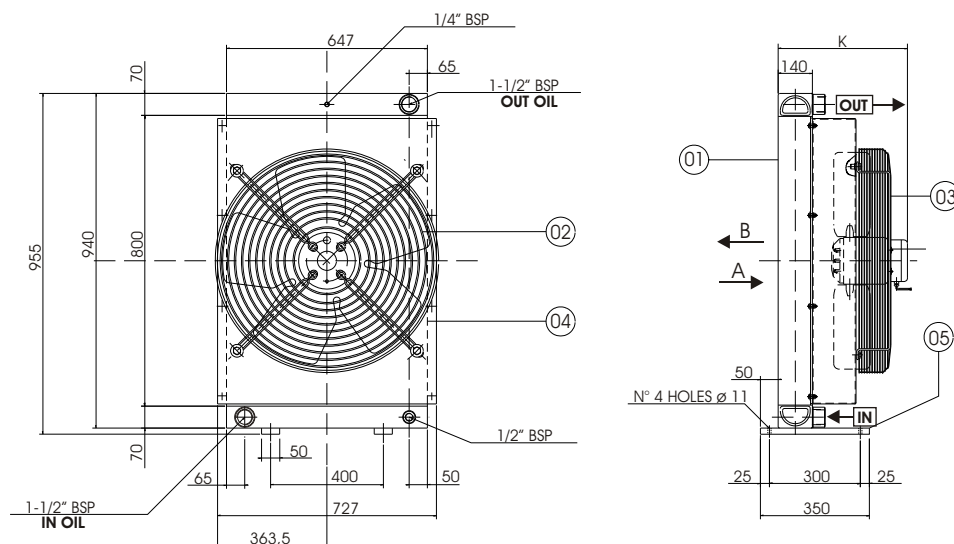

COOLER TECHNICAL DATA		FAN MOTORS TECHNICAL DATA		
Max working Pressure	:20 bar	Tension	CA: DIN IEC38	DC: 12/24V
Max working Temperature	: + 120° C	Max Working Temperature	: + 75° C	+ 75°C
Max oil Viscosity	: 100 CST	Min Working Temperature	: - 30° C	
Main Material	: Alluminium	Main Material	: Steel	: Fiber Glass
Cooling Fluid	: Compatible Al	Motor Protection	: IP 44	: IP 64
Colour	: Black	Colour	: Black	

SPARE PARTS

Pos.	Description	Code	Pos.	Description	Code
CSA 8.38.0.00			CSA 8.G2.0.00		
01	Cooler	CSA8.00.0.00	01	Cooler	CSA8.00.0.00
02	Fan Motor(Air Flow Suction) + Safety Guard	10.70023 .1	02	Fan Motor(Fan Motor Suction)	11.70089 .1
02	Fan Motor(Air Flow Blowing) + Safety Guard	10.70024 .1	02	Fan Motor(Fan Motor Blowing)	11.70181 .1
04	Cowl	15.65015.0	03	Safety Guard	09.70061 .1
			04	Cowl	15.65015 .0
CSA 8.GD.0.00					
01	Cooler	CSA8.00.0.00			
02	Fan Motor(Air Flow Suction)	11.70089 .1			
02	Fan Motor(Air Flow Blowing)	11.70181 .1			
03	Safety Guard	09.70061 .1			
04	Cowl	15.65015.0			