




Code	Tension V	Frequency Hz	Rpm	Power Kw	Dia.Fan Weel.	dB (A)	K mm.
CSL 05.12.0.00	12	DC	4000	0.080	167	65	170
CSL 05.24.0.00	24	DC	4100	0.080	167	65	170
CSL 05.22.0.00	230	50/60	2650/2950	0.045/0.043	170	64	125
CSL 05.38.0.00	230/400	50/60	2650	0,040	170	64	125

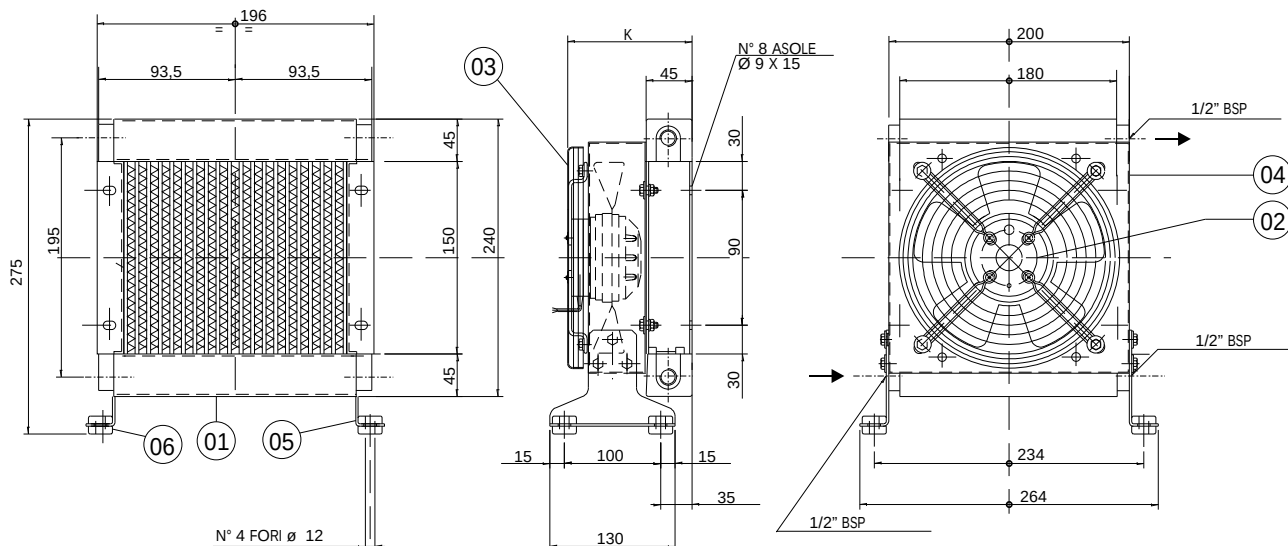

COOLER TECHNICAL DATA		FAN MOTORS TECHNICAL DATA		
Max working Pressure	:20 bar	Tension	CA: DIN IEC38	DC: 12/24V
Max working Temperature	: + 120° C	Max Working Temperature	: + 75° C	+ 75°C
Max oil Viscosity	: 100 CST	Min Working Temperature	: - 30° C	
Main Material	: Alluminium	Main Material	: Steel	: Fiber Glass
Cooling Fluid	: Compatible Al	Motor Protection	: IP 44	: IP 64
Colour	: Black	Colour	: Black	

SPARE PARTS

Pos.	Description	Code
------	-------------	------

CSL 05.12.0.00		
01	Cooler	CSL05.00.0.00
02	Fan Motor(Air Flow Suction)	10.70112 .1
02	Fan Motor(Air Flow Blowing)	10.70114 .1
04	Cowl	15.65004 .0
05	Fixing Support	15.65008 .0
06	Shock Adsorber	20.80000 .1

CSL 05.22.0.00		
01	Cooler	CSL05.00.0.00
02	Fan Motor(Air Flow Suction)	10.70026 .1
02	Fan Motor(Air Flow Blowing)	10.70028 .1
03	Safety Guard	10.70117 .1
04	Cowl	15.65004 .0
05	Fixing Support	15.65008 .0
06	Shock Adsorber	20.80000 .1


SPARE PARTS

Pos.	Description	Code
------	-------------	------


CSL 05.24.0.00		
01	Cooler	CSL05.00.0.00
02	Fan Motor(Air Flow Suction)	10.70113 .1
02	Fan Motor(Air Flow Blowing)	10.70115 .1
04	Cowl	15.65004 .0
05	Fixing Support	15.65008 .0
06	Shock Adsorber	20.80000 .1

CSL 05.38.0.00		
01	Cooler	CSL05.00.0.00
02	Fan Motor(Air Flow Suction)	10.70025 .1
02	Fan Motor(Air Flow Blowing)	10.70027 .1
03	Safety Guard	10.70117 .1
04	Cowl	15.65004 .0
05	Fixing Support	15.65008 .0
06	Shock Adsorber	20.80000 .1


THERMIC EFFICIENCY

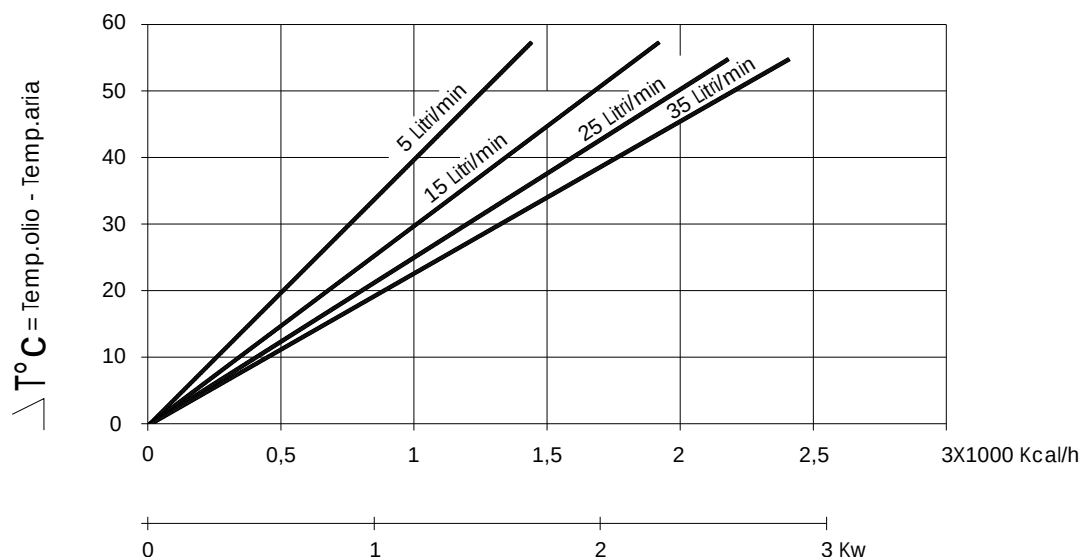

PRESSURE DROP

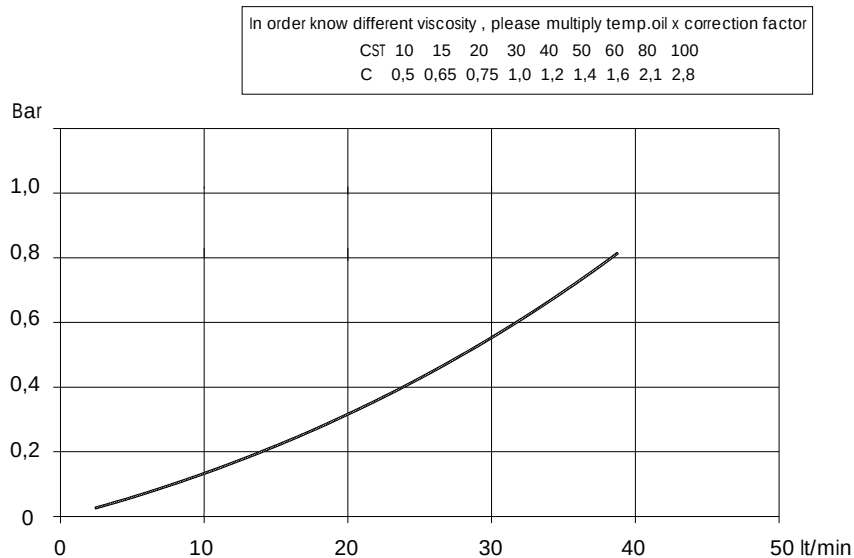

CODIFICATION

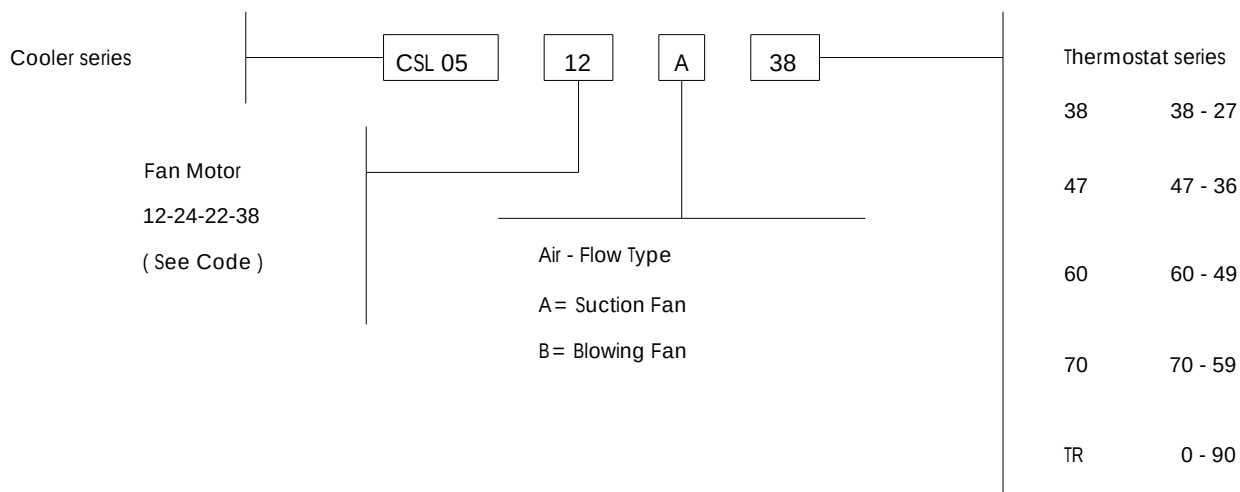

Technical characteristic herein mentioned are not binding and it can be modified from CIESSE without any notice.