





LEHENGOTAK, S. A.





Water / oil coolers series CSPI 1

Code	Capacity lt	Oil flow lt/min	KW Dissipated	Max Weight kg	Overall dimensions											
					A	B	C	D	E10	E16	Fs	FL	G	H	Ls	Ll
CSPI 1- 19-*. *	0,855	5 - 35	4 - 7	32,00	460	200	380	69	81	87	45	68	1 1/4"	190	63	86
CSPI 1- 31-*. *	1,395	15 - 70	7 - 12	32,00	460	200	380	69	117	123	45	68	1 1/4"	190	63	86
CSPI 1- 35-*. *	1,575	20 - 100	11 - 18	44,00	460	200	380	69	129	135	45	68	1 1/4"	190	63	86
CSPI 1- 27-*. *	1,215	10 - 45	7 - 13	32,00	460	200	380	69	105	111	45	68	1 1/4"	190	63	86
CSPI 1- 33-*. *	1,485	20 - 75	14 - 24	32,00	460	200	380	69	123	129	45	68	1 1/4"	190	63	86
CSPI 1- 57-*. *	2,565	25 - 102	18 - 33	44,00	460	200	380	69	195	201	45	68	1 1/4"	190	63	86

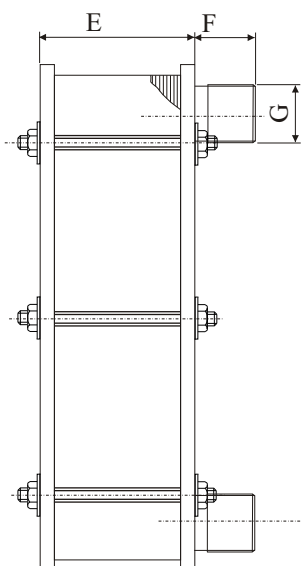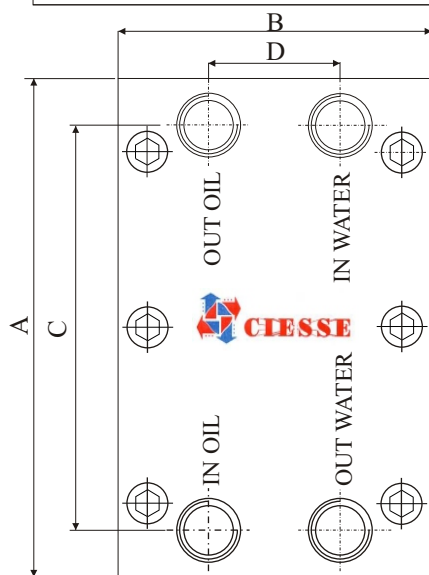

SPECIAL CONNECTIONS

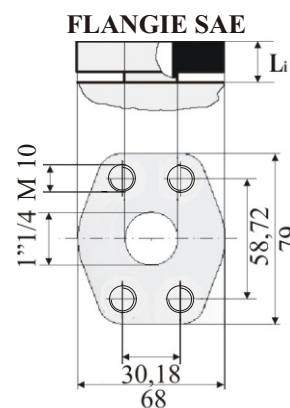


TECHNICAL DATA

Code	Plate	Frame	Max Working Pressure		Test Pressure		Max Working Temperature		
			10 bar	16 bar	14,8 bar	23,7 bar	NBR Gaskets 110 °C	EPDM Gaskets 140 °C	VITON 180 °C
All	Aisi 316L or Titanium	Steel							

In order different viscosity , please multiply temp.x correction factor

CST 10 15 20 30 40 50 60 80 100
C 0,5 0,65 0,75 1,0 1,2 1,4 1,6 2,1 2,8

PRESSURE DROP

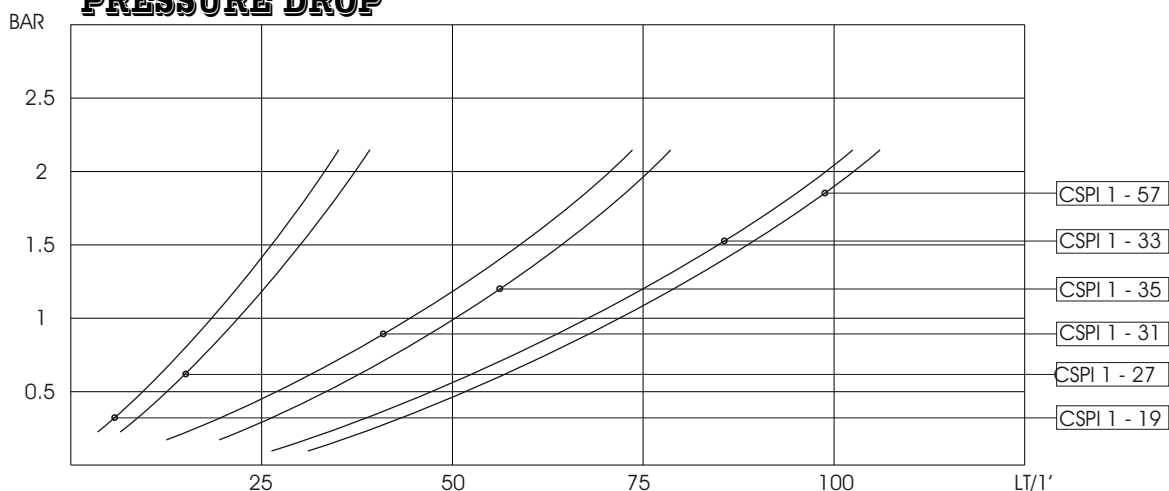


Technical characteristic herein mentioned are not binding and it can be modified from CIESSE without any notice.




LEHENGOTAK, S. A.


THERMIC EFFICIENCY DIAGRAM CSPI 1

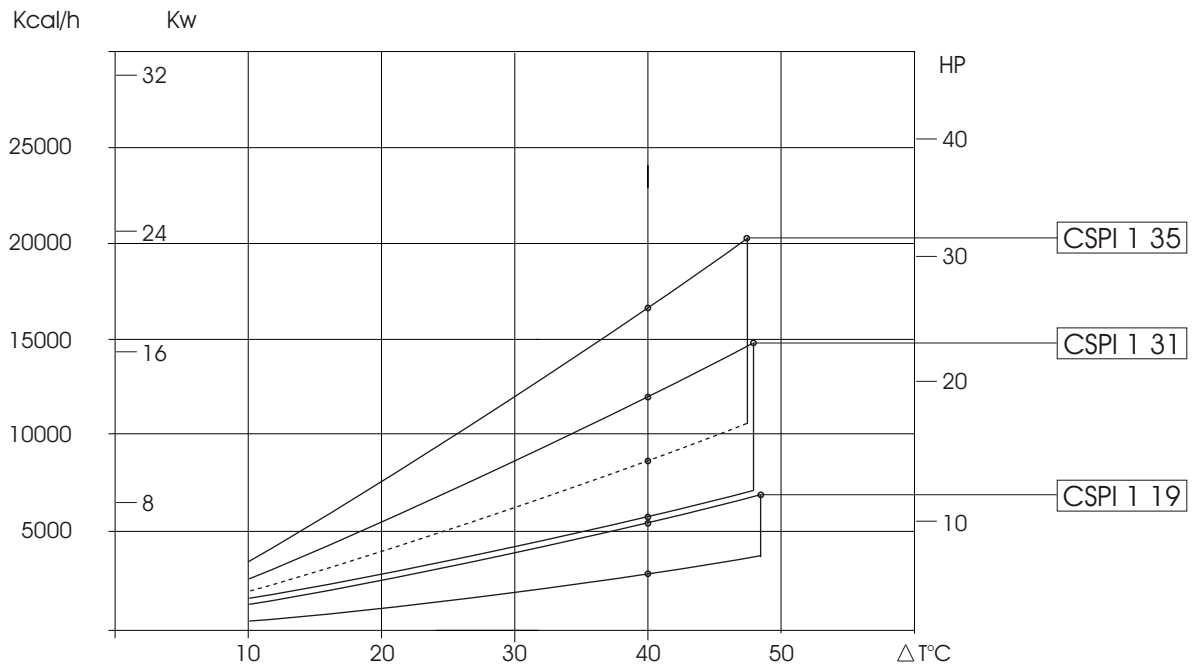

THERMIC EFFICIENCY DIAGRAM CSPI 1

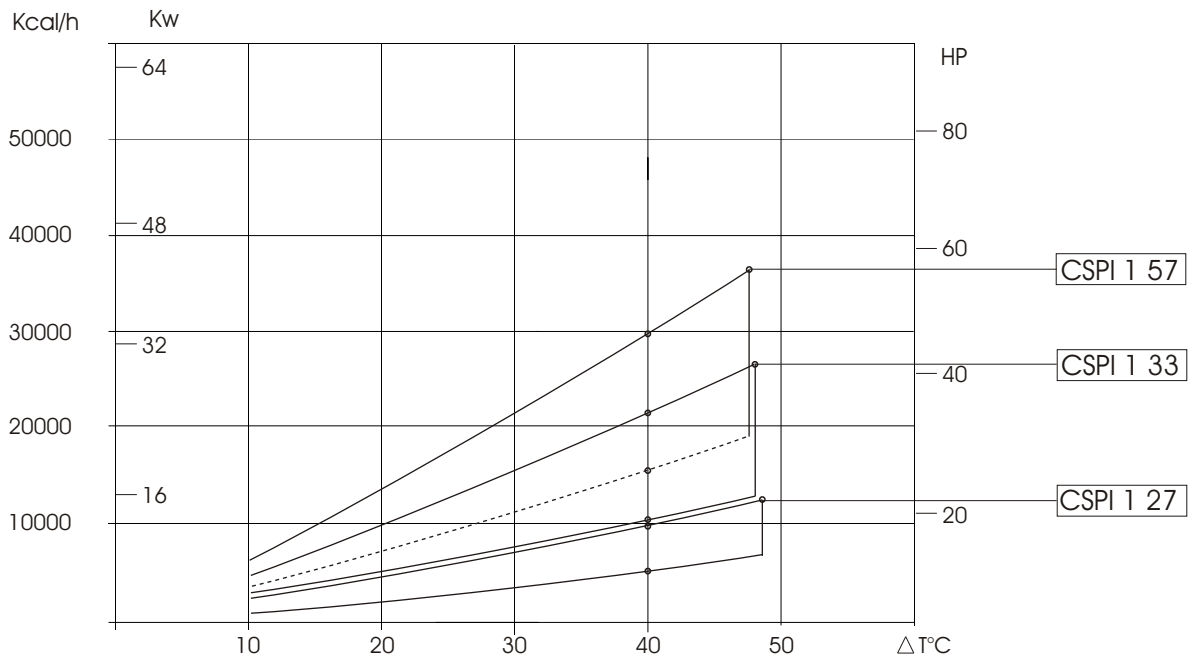

CODIFICATION

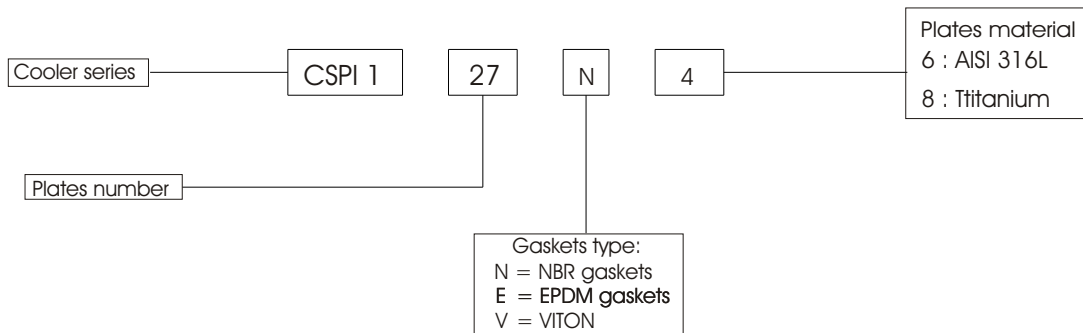

Technical characteristic herein mentioned are not binding and it can be modified from CIESSE without any notice.