
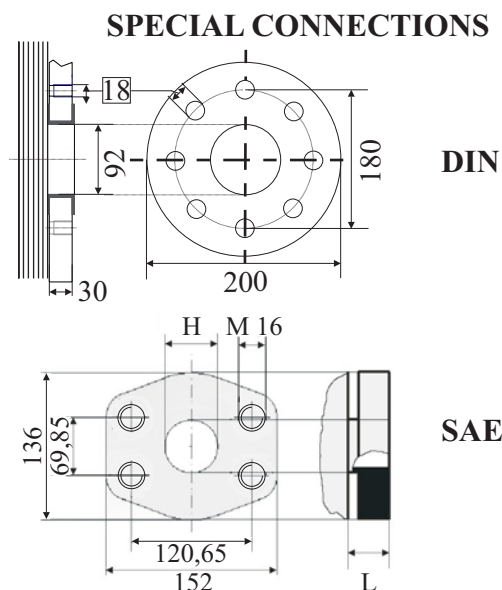
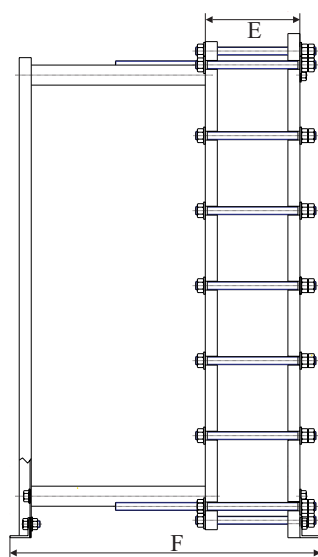


Water / oil coolers series CSPI 3

Code	Capacity	Oil flow	KW Dissipated	Max Weight	Overall dimensions								
	Lt	Lt/min		kg	A	B	C	D	E	F	G	H	L
CSPI 3- 11-*. *	4,605	15 - 70	15 - 34	362	1197	460	935	223	93,22	773	161	3”1/4	100
CSPI 3- 21-*. *	8,830	30 - 130	30 - 67	362	1197	460	935	223	123,42	773	161	3”1/4	100
CSPI 3- 35-*. *	14,745	45 - 190	40 - 107	362	1197	460	935	223	165,7	773	161	3”1/4	100
CSPI 3- 43-*. *	18,125	60 - 240	36 - 71	362	1197	460	935	223	189,86	773	161	3”1/4	100
CSPI 3- 55-*. *	23,195	85 - 340	58 - 137	362	1197	460	935	223	226,1	773	161	3”1/4	100
CSPI 3- 65-*. *	27,420	115 - 450	62 - 203	445	1197	460	935	223	256,3	1103	161	3”1/4	100

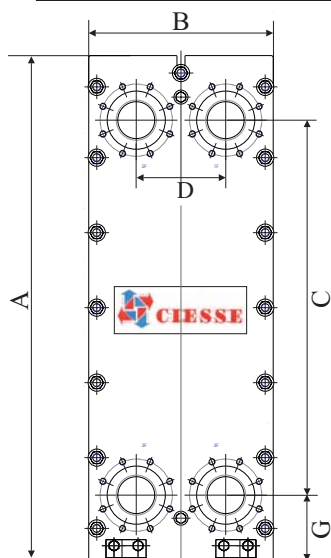


TECHNICAL DATA

Code	Plate	Frame	Max Working Pressure		Test Pressure		Max Working Temperature		
			12 bar	16 bar	17,8 bar	23,7 bar	NBR Gaskets 110 °C	EPDM Gaskets 140 °C	VITON 180 °C
All	Aisi 316L or Titanium	Steel							

In order different viscosity , please multiply temp.x correction factor


CST 10 15 20 30 40 50 60 80 100
C 0,5 0,65 0,75 1,0 1,2 1,4 1,6 2,1 2,8

PRESSURE DROP

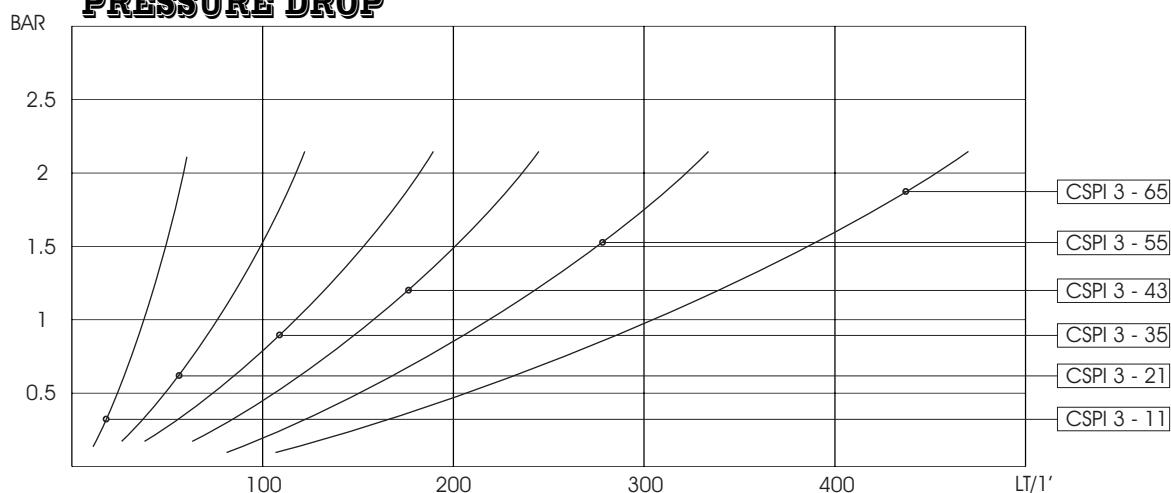


Technical characteristic herein mentioned are not binding and it can be modified from CIESSE without any notice.


THERMIC EFFICIENCY DIAGRAM CSPI 3

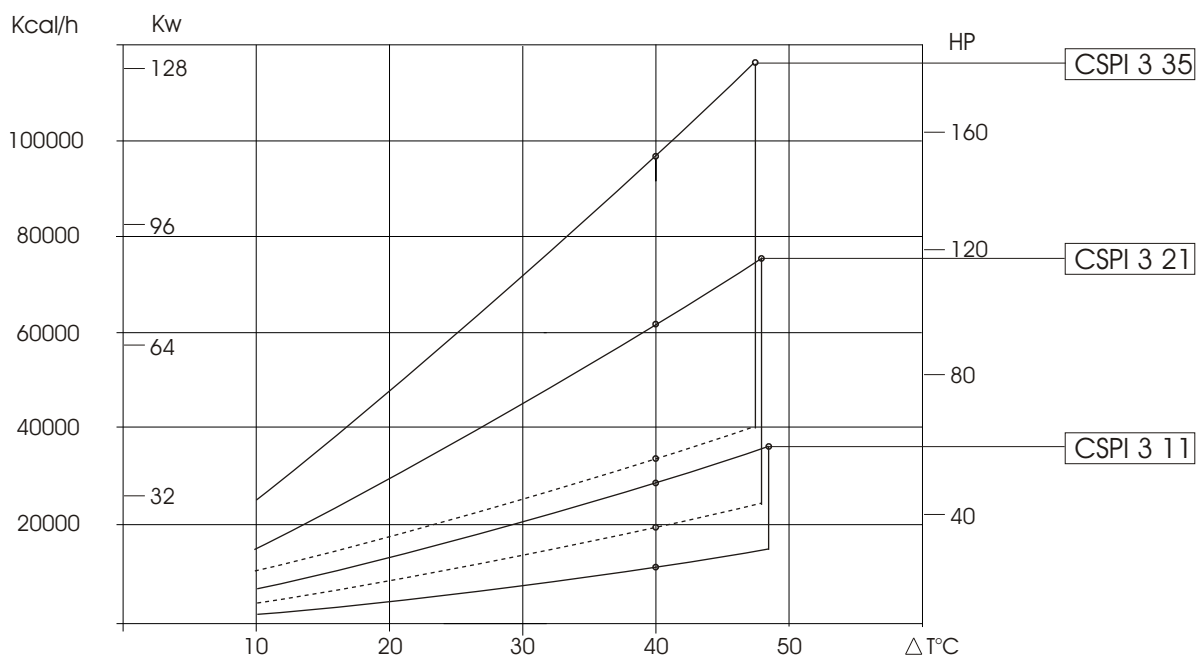

THERMIC EFFICIENCY DIAGRAM CSPI 3

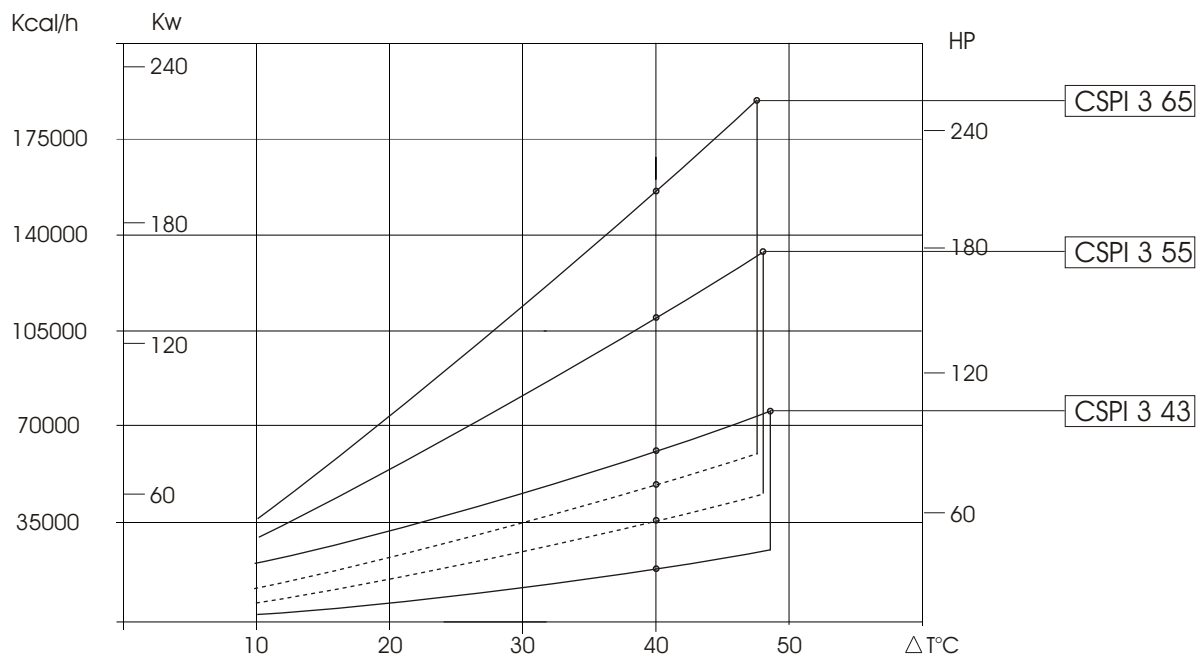

CODIFICATION

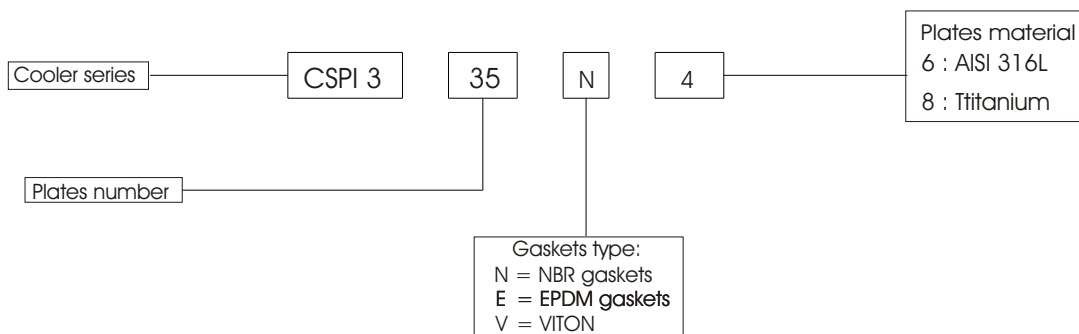

Technical characteristic herein mentioned are not binding and it can be modified from CIESSE without any notice.