



LEHENGOTEK, S. A.



CUR2015

Valvole unidirezionali
Check valves




Dati tecnici Technical data




LEHENGOTEK, S. A.

Viscosità fluido Fluid viscosity	10-500 mm ² /s 45 to 2000 ssu (6 to 420 cSt)
Classe di contaminazione Filtration	ISO code 16/13 SAE class 4 or better
Temperatura fluido Fluid temperature	-20°C +80°C -4°F +176°F
Temperatura ambiente Ambient temperature	-20°C +50°C -4°F +122°F

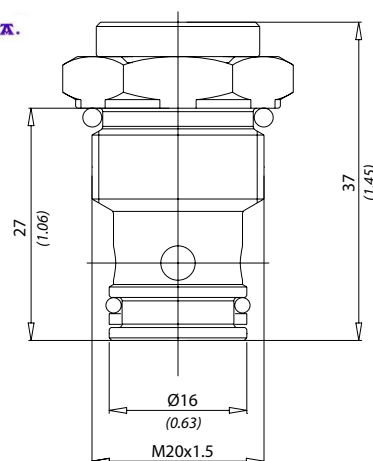


mm
(Inches)

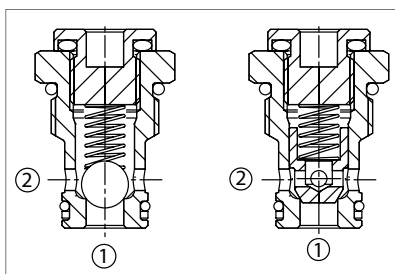

Caratteristiche tecniche Technical performances

Codice Code	Portata Max Max flow l/min - USgpm	Pressione Max Max pressure bar/PSI	Peso approssimativo Approx weight Kg / lb	Coppia di serraggio Tightening torque Nm / lbf ft	Cavità Cavity
CUR2015	25 (6.5)	350 (5000)	0,07 (0.15)	25-30 (19-22)	C2015/2



Codice ordinazione Ordering code

CUR2015 - X - Y

X	Tenuta - Sealing	Y	Molla / Spring
SF	Tenuta a sfera Ball sealing	1	1 bar (15 PSI)
SP	Tenuta a otturatore Poppet sealing		



LEHENGOTEK, S. A.