





LEHENGOTAK, S.A.

Schneidringverschraubungen

Cutting Ring Couplings

■ 2S
■ ES-4

■ 2S
■ ES-4

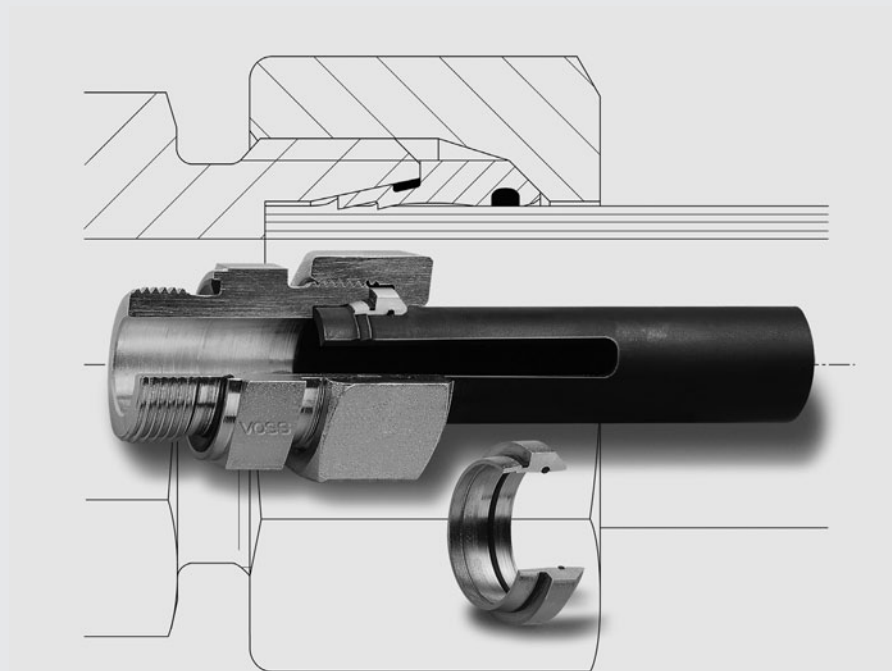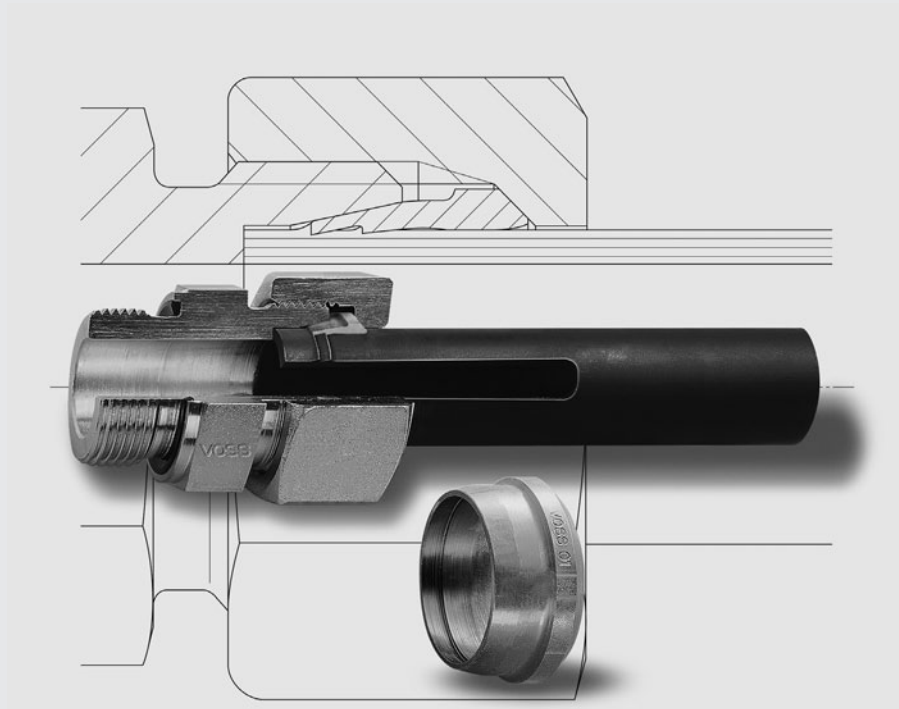

Erfahrung plus Ideen
Experience plus ideas

Manometer- verschraubungen


Innengewinde:
Whitworth-Rohrgewinde

Einsteckausführung
mit Dichtkegel und O-Ring

Gauge couplings

Female thread:
Whitworth pipe thread

Male connector
with taper and O-ring



Typ Type	(MG 4) Bestell-Nr. Order No.	€/100 ¹⁾ €/100 ¹⁾
L 6 - G 1/4	1142002058*	660,25
L 8 - G 1/4	1142052058	667,81
L 10 - G 1/4	1142102058	666,23
L 12 - G 1/4	1142152058	684,16
S 6 - G 1/2	1142502058	1.125,58
S 8 - G 1/4	1142572058	1.271,73
S 8 - G 1/2	1142552058	1.145,70
S 10 - G 1/2	1142602058	1.203,54
S 12 - G 1/4	1142662058	3.736,42
S 12 - G 1/2	1142652058	1.173,38

* Beispiel Bez. Vergl.:
MAVE06LRVIT

¹⁾ € / 100 Stück, Stahl

* Sample product code:
MAVE06LRVIT

¹⁾ € / 100 Pieces, steel