
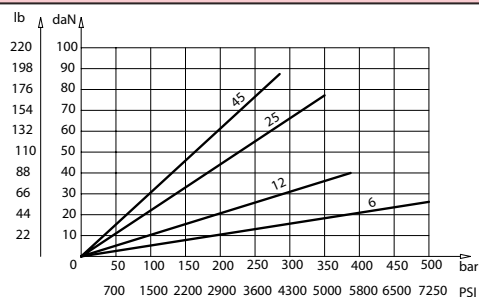
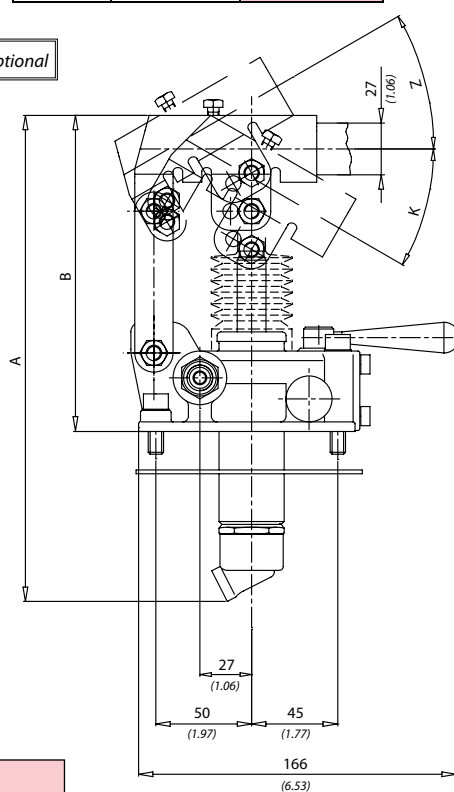
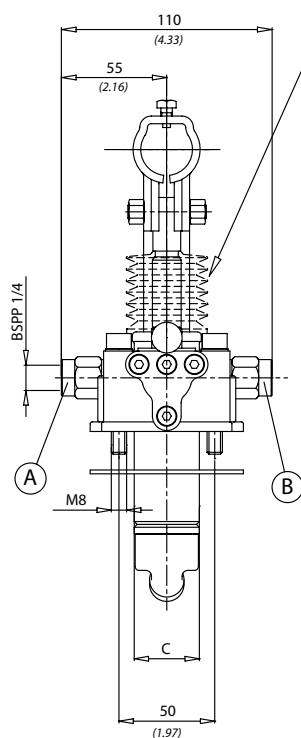
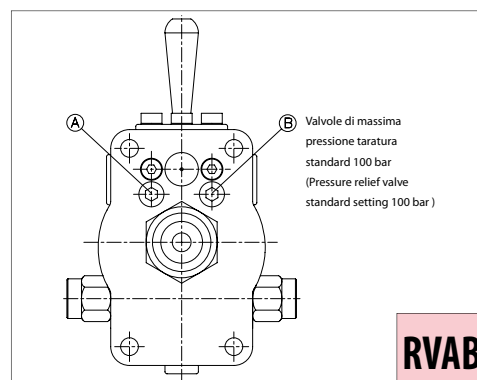
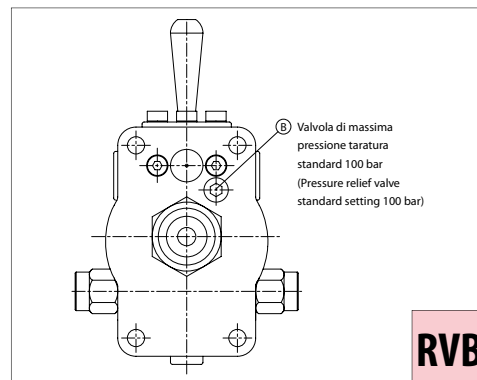


The pump is supplied with shaped seal, fixing screws and acting lever 23 in. long

Dati tecnici <i>Technical data</i>	
Viscosità fluido <i>Fluid viscosity</i>	10-500 mm ² /s 45 to 2000 ssu (6 to 420 cSt)
Classe di contaminazione <i>Filtration</i>	ISO code 16/13 SAE class 4 or better
Temperatura fluido <i>Fluid temperature</i>	-20°C +80°C -4°F + 176°F
Temperatura ambiente <i>Ambient temperature</i>	-20°C +50°C -4°F + 122°F

Caratteristiche tecniche <i>Technical performances</i>		
Codice <i>Code</i>	Pressione Max <i>Max pressure</i> bar/PSI	Peso approssimativo <i>Approx weight</i> Kg / lb
PMT6	500 (7250)	4,4 (9.7)
PMT12	380 (5500)	
PMT25	350 (5000)	
PMT45	280 (4000)	

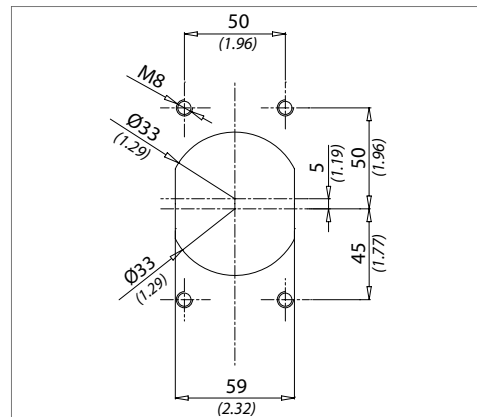

Y	Cilindrata / Displacement	K	Z	A	B	C
6	6 cm ³ (0.36 in ³)	31°	26°	253 (9.96)	166 (6.53)	34 (1.33)
12	12 cm ³ (0.73 in ³)	31°	35°			
25	25 cm ³ (1.52 in ³)	30°	25°	273 (10.74)	172 (6.77)	
45	45 cm ³ (2.75 in ³)	33°	35°	283 (11.14)		40 (1.57)

Codice ordinazione Ordering code	
PMT - Y - X	
X	Optional
P	Soffietto <i>With rubber protection</i>
RVAB	Con valvola di massima pressione su A e B <i>With relief valve on A and B</i>
RVB	Con valvola di massima pressione su B <i>With relief valve on B</i>