

**Gerade
Anschweißverschraubungen**


mit Schweißnippel, Abdichtung: O-Ring

Straight welding connectors

with welding nipple, sealing: O-ring

Racoques para soldar rectos

con boquilla para soldar, cierre hermético: junta tórica

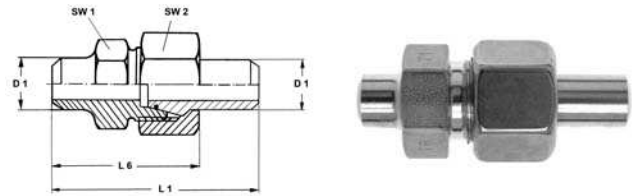

GASK-..

Type	Mat.-Nr.	PN	D1	L1	L6	SW1	SW2
GASK-10x2,0	708.1451.108.30	630	10	56.0	40.0	19	19
GASK-12x2,5	708.1451.123.30	630	12	62.0	45.0	22	22
GASK-16x3,0	708.1451.163.30	400	16	72.0	49.0	27	27
GASK-20x4,0	708.1451.203.30	400	20	81.0	57.0	32	32
GASK-25x5,0	708.1451.256.30	400	25	92.0	64.0	41	41
GASK-30x6,0	708.1451.306.30	400	30	97.0	67.0	46	46
GASK-38x7,0	708.1451.383.30	315	38	109.0	75.0	55	55

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.

10



LEHENGOMAK, S. A.