

# Schneidringverschraubung Cutting Ring Fitting

# Racor de anillo cortante

## Reduzierschweißnippel


mit O-Ring-Abdichtung - FPM

## Welding reducers

with o-ring sealing - FPM

## Boquillas de reducción para soldar

con cierre de junta tórica - FPM

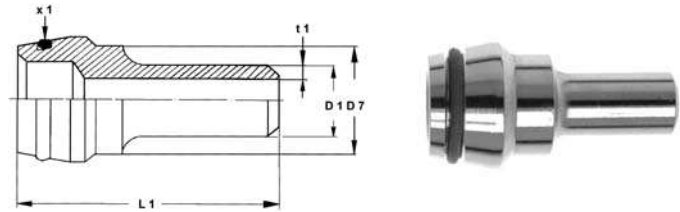

**SKR**

Type	Mat.-Nr.	D1 x t1	D7	L1	x1	g/Stk
SKR-08/06x1,5	708.1454.141.30	06x1.5	8.0	32.5	6.0x1.5	14
SKR-10/06x1,5	708.1454.176.30	06x1.5	10.0	32.5	7.5x1.5	15
SKR-10/08x1,5	708.1454.194.30	08x1.5	10.0	32.5	7.5x1.5	16
SKR-10/08x2,0	708.1454.189.30	08x2.0	10.0	32.5	7.5x1.5	17
SKR-12/08x1,5	708.1454.227.30	08x1.5	12.0	32.5	9.0x1.5	18
SKR-12/10x1,5	708.1454.243.30	10x1.5	12.0	32.5	9.0x1.5	18
SKR-12/10x2,0	708.1454.244.30	10x2.0	12.0	32.5	9.0x1.5	22
SKR-16/08x1,5	708.1454.469.30	08x1.5	16.0	39.0	12.0x2.0	26
SKR-16/10x2,0	708.1454.472.30	10x2.0	16.0	39.0	12.0x2.0	34
SKR-16/12x2,0	708.1454.482.30	12x2.0	16.0	39.0	12.0x2.0	47
SKR-20/08x1,5	708.1454.656.30	08x1.5	20.0	44.5	16.3x2.4	58
SKR-20/10x1,5	708.1454.661.30	10x1.5	20.0	44.5	16.3x2.4	68
SKR-20/12x2,0	708.1454.666.30	12x2.0	20.0	44.5	16.3x2.4	72
SKR-20/16x2,0	708.1454.686.30	16x2.0	20.0	44.5	16.3x2.4	74
SKR-20/16x2,5	708.1454.687.30	16x2.5	20.0	44.5	16.3x2.4	76
SKR-20/16x3,0	708.1454.688.30	16x3.0	20.0	44.5	16.3x2.4	78
SKR-25/10x2,0	708.1454.792.30	10x2.0	25.0	49.5	20.3x2.4	106
SKR-25/12x2,0	708.1454.793.30	12x2.0	25.0	49.5	20.3x2.4	121
SKR-25/16x2,0	708.1454.801.30	16x2.0	25.0	49.5	20.3x2.4	115
SKR-25/16x2,5	708.1454.802.30	16x2.5	25.0	49.5	20.3x2.4	100
SKR-25/16x3,0	708.1454.803.30	16x3.0	25.0	49.5	20.3x2.4	123
SKR-25/20x2,0	708.1454.821.30	20x2.0	25.0	49.5	20.3x2.4	94
SKR-25/20x2,5	708.1454.822.30	20x2.5	25.0	49.5	20.3x2.4	104
SKR-25/20x3,0	708.1454.823.30	20x3.0	25.0	49.5	20.3x2.4	108
SKR-30/12x2,0	708.1454.927.30	12x2.0	30.0	52.0	25.3x2.4	145
SKR-30/16x3,0	708.1454.929.30	16x3.0	30.0	52.0	25.3x2.4	182
SKR-30/20x3,0	708.1454.930.30	20x3.0	30.0	52.0	25.3x2.4	169
SKR-30/25x3,0	708.1454.931.30	25x3.0	30.0	52.0	25.3x2.4	136
SKR-38/12x2,0	708.1454.957.30	12x2.0	38.0	56.5	33.3x2.4	234
SKR-38/16x2,0	708.1454.958.30	16x2.0	38.0	56.5	33.3x2.4	279
SKR-38/16x3,0	708.1454.959.30	16x3.0	38.0	56.5	33.3x2.4	309
SKR-38/20x2,5	708.1454.960.30	20x2.5	38.0	56.5	33.3x2.4	278
SKR-38/20x3,0	708.1454.961.30	20x3.0	38.0	56.5	33.3x2.4	293
SKR-38/25x3,0	708.1454.962.30	25x3.0	38.0	56.5	33.3x2.4	208
SKR-38/25x4,0	708.1454.963.30	25x4.0	38.0	56.5	33.3x2.4	285
SKR-38/30x3,0	708.1454.977.30	30x3.0	38.0	56.5	33.3x2.4	256
SKR-38/30x4,0	708.1454.974.30	30x4.0	38.0	56.5	33.3x2.4	286

O-Ringe aus FPM werden separat mitgeliefert, erst nach Schweißvorgang aufziehen. FPM o-rings supplied seperately, to be fitted after welding.

Las juntas tóricas de FPM se suministran por separado; montarlas después del proceso de soldado.

passend in 24°-Innenkonus  
(Bohrungsform W DIN 3861)

fitting type 24° inside tapers  
(bore type W DIN 3861)

encaja en cono interior de 24°  
(forma de taladro W DIN 3861)