

Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

Winkel-Schwenkverschraubungen


Einschraubgewinde: Whitworth-Rohrgewinde - zylindrisch

Banjo couplings

Stud thread: BSP thread - parallel

Racores orientables angulares

Rosca de conexión: Rosca Witworth para tubos - cilíndrica

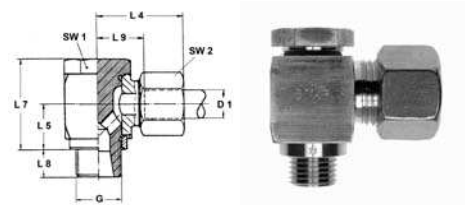

ESWV-..LR/SR

Type	Mat.-Nr.	Serie	PN	D1	G	L4	L5	L7	L8	L9	SW1	SW2	g/Stk
ESWV-04LLR 1.8	708.2840.060.10	LL	100	4	1/8	25.5	10.0	21.0	8.0	16.0	14	10	40
ESWV-06LLR 1.8	708.2840.100.10	LL	100	6	1/8	26.0	10.0	21.0	8.0	14.5	14	12	42
ESWV-08LLR 1.8	708.2840.160.10	LL	100	8	1/8	26.0	10.0	21.0	8.0	14.5	14	14	52
ESWV-06LR 1.8	708.2840.100.20	L	315	6	1/8	27.5	10.0	21.0	8.0	13.0	14	14	59
ESWV-06LR 1.4	708.2840.110.20	L	315	6	1/4	29.5	13.5	23.0	10.0	15.0	19	14	59
ESWV-08LR 1.4	708.2840.170.20	L	315	8	1/4	28.5	13.5	27.0	10.0	14.0	19	17	93
ESWV-10LR 1.4	708.2840.270.20	L	315	10	1/4	29.5	13.5	27.0	10.0	15.0	19	19	102
ESWV-12LR 1.4	708.2840.380.20	L	315	12	1/4	29.5	15.5	30.0	10.0	15.0	19	22	158
ESWV-12LR 3.8	708.2840.390.20	L	315	12	3/8	32.0	16.0	32.5	10.0	17.5	22	22	159
ESWV-15LR 1.2	708.2840.534.20	L	315	15	1/2	36.0	19.5	43.0	14.0	21.0	27	27	284
ESWV-18LR 1.2	708.2840.646.20	L	315	18	1/2	36.5	21.5	43.0	12.0	20.5	27	32	320
ESWV-22LR 3.4	708.2840.768.20	L	160	22	3/4	43.0	24.0	48.0	16.0	27.0	32	36	485
ESWV-28LR 1.1	708.2840.850.20	L	160	28	1	48.0	30.5	59.0	18.0	31.5	41	41	882
ESWV-35LR 5.4	708.2840.944.20	L	160	35	1 1/4	57.0	35.5	70.0	20.0	35.5	50	50	1508
ESWV-42LR 3.2	708.2840.992.20	L	160	42	1 1/2	62.5	40.5	80.0	22.0	40.0	55	60	2341
ESWV-06SR 1.4	708.2840.110.30	S	400	6	1/4	30.5	13.5	27.0	10.0	16.0	19	17	87
ESWV-08SR 1.4	708.2840.170.30	S	400	8	1/4	30.5	13.5	27.0	10.0	16.0	19	19	103
ESWV-10SR 3.8	708.2840.280.30	S	400	10	3/8	34.0	16.0	32.5	10.0	18.0	22	22	170
ESWV-14SR 1.2	708.2840.504.30	S	400	14	1/2	39.5	19.5	41.0	12.0	22.0	27	27	303
ESWV-16SR 1.2	708.2840.566.30	S	400	16	1/2	39.5	21.5	43.0	12.0	21.5	27	30	316
ESWV-20SR 3.4	708.2840.704.30	S	315	20	3/4	47.5	24.0	48.0	16.0	26.0	32	36	518
ESWV-25SR 1.1	708.2840.810.30	S	250	25	1	55.0	30.5	59.0	18.0	31.0	41	46	1030
ESWV-30SR 5.4	708.2840.902.30	S	250	30	1 1/4	63.0	35.5	70.0	20.0	36.5	50	50	1637
ESWV-38SR 3.2	708.2840.953.30	S	250	38	1 1/2	71.5	40.5	80.0	22.0	41.0	55	60	2627

L4 ist ein Ungefährmaß bei angezogener Überwurfmutter.

L4 = approximate length with tightened nut.

L4 es una medida aproximada con la tuerca de unión apretada.

Mit metallischem Dichtkantenring.

With metal seal-edge ring.

Con anillo con borde de obturación metálico.



LEHENGOTAK, S. A.