

Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

Winkel-Schwenkverschraubungen


Einschraubgewinde: Whitworth-Rohrgewinde - zylindrisch

Banjo couplings

Stud thread: BSP thread - parallel

Racores orientables angulares

Rosca de conexión: Rosca Witworth para tubos - cilíndrica

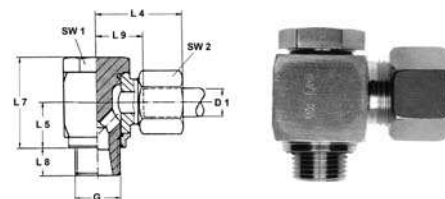

ESWV-..LR-WD/SR-WD

Type	Mat.-Nr.	Serie	PN	D1	G	L4	L5	L7	L8	L9	SW1	SW2	g/Stk
ESWV-04LLR 1.8 WD	708.2841.060.10	LL	100	4	1/8	25.5	10.0	21.0	8.0	16.0	14	10	40
ESWV-06LLR 1.8 WD	708.2841.100.10	LL	100	6	1/8	26.0	10.0	21.0	8.0	14.5	14	12	42
ESWV-08LLR 1.8 WD	708.2841.160.10	LL	100	8	1/8	26.0	10.0	21.0	8.0	14.5	14	14	52
ESWV-06LR 1.8 WD	708.2841.100.20	L	315	6	1/8	27.5	10.0	21.0	8.0	13.0	14	14	59
ESWV-06LR 1.4 WD	708.2841.110.20	L	315	6	1/4	29.5	13.5	23.0	10.0	15.0	19	14	59
ESWV-08LR 1.4 WD	708.2841.170.20	L	315	8	1/4	28.5	13.5	27.0	10.0	14.0	19	17	93
ESWV-10LR 1.4 WD	708.2841.270.20	L	315	10	1/4	29.5	13.5	27.0	10.0	15.0	19	19	102
ESWV-12LR 1.4 WD	708.2841.380.20	L	315	12	1/4	29.5	15.5	30.0	10.0	15.0	19	22	158
ESWV-12LR 3.8 WD	708.2841.390.20	L	315	12	3/8	32.0	16.0	32.5	10.0	17.5	22	22	159
ESWV-15LR 1.2 WD	708.2841.534.20	L	315	15	1/2	36.0	19.5	43.0	14.0	21.0	27	27	284
ESWV-18LR 1.2 WD	708.2841.646.20	L	315	18	1/2	36.5	21.5	43.0	12.0	20.5	27	32	320
ESWV-22LR 3.4 WD	708.2841.768.20	L	160	22	3/4	43.0	24.0	48.0	16.0	27.0	32	36	485
ESWV-28LR 1.1 WD	708.2841.850.20	L	160	28	1	48.0	30.5	59.0	18.0	31.5	41	41	882
ESWV-35LR 5.4 WD	708.2841.944.20	L	160	35	1 1/4	57.0	35.5	70.0	20.0	35.5	50	50	1508
ESWV-42LR 3.2 WD	708.2841.992.20	L	160	42	1 1/2	62.5	40.5	80.0	22.0	40.0	55	60	2341
ESWV-06SR 1.4 WD	708.2841.110.30	S	400	6	1/4	30.5	13.5	27.0	10.0	16.0	19	17	87
ESWV-08SR 1.4 WD	708.2841.170.30	S	400	8	1/4	30.5	13.5	27.0	10.0	16.0	19	19	103
ESWV-10SR 3.8 WD	708.2841.280.30	S	400	10	3/8	34.0	16.0	32.5	10.0	18.0	22	22	170
ESWV-12SR 3.8 WD	708.2841.390.30	S	400	12	3/8	34.0	16.0	32.5	10.0	18.0	22	24	179
ESWV-14SR 1.2 WD	708.2841.504.30	S	400	14	1/2	39.5	19.5	41.0	12.0	22.0	27	27	303
ESWV-16SR 1.2 WD	708.2841.566.30	S	400	16	1/2	39.5	21.5	43.0	12.0	21.5	27	30	316
ESWV-20SR 3.4 WD	708.2841.704.30	S	315	20	3/4	47.5	24.0	48.0	16.0	26.0	32	36	518
ESWV-25SR 1.1 WD	708.2841.810.30	S	250	25	1	55.0	30.5	59.0	18.0	31.0	41	46	1030
ESWV-30SR 5.4 WD	708.2841.902.30	S	250	30	1 1/4	63.0	35.5	70.0	20.0	36.5	50	50	1637
ESWV-38SR 3.2 WD	708.2841.953.30	S	250	38	1 1/2	71.5	40.5	80.0	22.0	41.0	55	60	2627

L4 ist ein Ungefährmaß bei angezogener Überwurfmutter.

L4 = approximate length with tightened nut.

L4 es una medida aproximada con la tuerca de unión apretada.

Mit gekammertem Weichdichtring.

With bonded seal ring.

Con junta anular blanda protegida.



LEHENGOTAK, S. A.