

Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

Winkel-Schwenkverschraubungen


Einschraubgewinde: Metrisches Gewinde - zylindrisch

Banjo couplings

Stud thread: metric - parallel

Racores orientables angulares

Rosca de conexión: Rosca métrica - cilíndrica

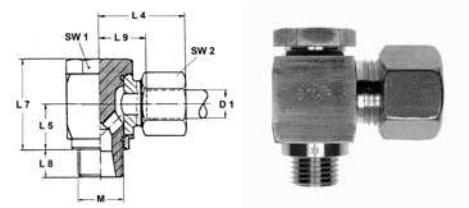

ESWV-..LM/SM

Type	Mat.-Nr.	Serie	PN	D1	M	L4	L5	L7	L8	L9	SW1	SW2	g/Stk
ESWV-04LLM 08x1,0	708.2843.090.10	LL	100	4	08x1.0	22.5	8.0	17.0	6.0	13.0	12	10	34
ESWV-06LLM 10x1,0	708.2843.180.10	LL	100	6	10x1.0	26.0	10.0	21.0	8.0	14.5	14	12	42
ESWV-08LLM 10x1,0	708.2843.230.10	LL	100	8	10x1.0	26.0	10.0	21.0	8.0	14.5	14	14	45
ESWV-06LM 10x1,0	708.2843.180.20	L	315	6	10x1.0	27.5	10.0	21.0	8.0	13.0	14	14	59
ESWV-08LM 12x1,5	708.2843.240.20	L	315	8	12x1.5	28.5	13.5	27.0	10.0	14.0	19	17	90
ESWV-10LM 14x1,5	708.2843.280.20	L	315	10	14x1.5	29.5	13.5	27.0	10.0	15.0	19	19	103
ESWV-12LM 16x1,5	708.2843.330.20	L	315	12	16x1.5	32.0	16.0	32.5	10.0	17.5	22	22	158
ESWV-15LM 18x1,5	708.2843.390.20	L	315	15	18x1.5	35.0	18.5	37.0	10.0	20.0	24	27	209
ESWV-18LM 22x1,5	708.2843.460.20	L	315	18	22x1.5	36.5	21.5	43.0	12.0	20.5	27	32	320
ESWV-22LM 26x1,5	708.2843.535.20	L	160	22	26x1.5	43.0	24.0	48.0	16.0	27.0	32	36	485
ESWV-28LM 33x2,0	708.2843.570.20	L	160	28	33x2.0	48.0	30.5	59.0	18.0	31.5	41	41	882
ESWV-35LM 42x2,0	708.2843.600.20	L	160	35	42x2.0	57.0	35.5	70.0	20.0	35.5	50	50	1508
ESWV-42LM 48x2,0	708.2843.992.20	L	160	42	48x2.0	62.5	40.0	80.0	22.0	40.0	60	60	2341
ESWV-06SM 12x1,5	708.2843.195.30	S	400	6	12x1.5	30.5	13.5	27.0	10.0	16.0	19	17	85
ESWV-08SM 14x1,5	708.2843.245.30	S	400	8	14x1.5	30.5	13.5	27.0	10.0	16.0	19	19	103
ESWV-10SM 16x1,5	708.2843.285.30	S	400	10	16x1.5	34.0	16.0	32.5	10.0	18.0	22	22	170
ESWV-12SM 18x1,5	708.2843.333.30	S	400	12	18x1.5	35.5	18.5	37.0	10.0	19.5	24	24	220
ESWV-16SM 22x1,5	708.2843.410.30	S	400	16	22x1.5	39.5	21.5	43.0	12.0	21.5	27	30	320
ESWV-20SM 27x2,0	708.2843.506.30	S	315	20	27x2.0	47.5	24.0	48.0	16.0	26.0	32	36	518
ESWV-25SM 33x2,0	708.2843.550.30	S	250	25	33x2.0	55.0	30.5	58.0	18.0	31.0	41	46	1030
ESWV-30SM 42x2,0	708.2843.600.30	S	250	30	42x2.0	63.0	35.5	70.0	20.0	36.5	50	50	1640
ESWV-38SM 48x2,0	708.2843.954.20	S	250	38	48x2.0	71.5	40.5	80.0	22.0	41.0	60	60	2530

L4 ist ein Ungefährmaß bei angezogener Überwurfmutter.

L4 = approximate length with tightened nut.

L4 es una medida aproximada con la tuerca de unión apretada.

Mit metallischem Dichtkantenring.

With metal seal-edge ring.

Con anillo con borde de obturación metálico.



LEHENGOMK, S. A.