

Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

Winkel-Schwenkverschraubungen


Einschraubgewinde: Metrisches Gewinde - zylindrisch

Banjo couplings

Stud thread: metric - parallel

Racores orientables angulares

Rosca de conexión: Rosca métrica - cilíndrica

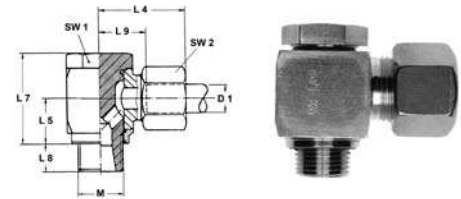

ESWV-..LM-WD/SM-WD

Type	Mat.-Nr.	Serie	PN	D1	M	L4	L5	L7	L8	L9	SW1	SW2	g/Stk
ESWV-04LLM 08x1,0 WD	708.2842.090.10	LL	100	4	08x1.0	22.5	8.0	17.0	6.0	13.0	12	10	34
ESWV-06LLM 10x1,0 WD	708.2842.180.10	LL	100	6	10x1.0	26.0	10.0	21.0	8.0	14.5	14	12	42
ESWV-08LLM 10x1,0 WD	708.2842.230.10	LL	100	8	10x1.0	26.0	10.0	21.0	8.0	14.5	14	14	45
ESWV-06LM 10x1,0 WD	708.2842.180.20	L	315	6	10x1.0	27.5	10.0	21.0	8.0	13.0	14	14	59
ESWV-08LM 12x1,5 WD	708.2842.240.20	L	315	8	12x1.5	28.5	13.5	27.0	10.0	14.0	19	17	90
ESWV-10LM 14x1,5 WD	708.2842.280.20	L	315	10	14x1.5	29.5	13.5	27.0	10.0	15.0	19	19	103
ESWV-12LM 16x1,5 WD	708.2842.330.20	L	315	12	16x1.5	32.0	16.0	32.5	10.0	17.5	22	22	158
ESWV-15LM 18x1,5 WD	708.2842.390.20	L	315	15	18x1.5	35.0	18.5	37.0	10.0	20.0	24	27	209
ESWV-18LM 22x1,5 WD	708.2842.460.20	L	315	18	22x1.5	36.5	21.5	43.0	12.0	20.5	27	32	320
ESWV-22LM 26x1,5 WD	708.2842.535.20	L	160	22	26x1.5	43.0	24.0	48.0	16.0	27.0	32	36	485
ESWV-28LM 33x2,0 WD	708.2842.570.20	L	160	28	33x2.0	48.0	30.5	59.0	18.0	31.5	41	41	882
ESWV-35LM 42x2,0 WD	708.2842.600.20	L	160	35	42x2.0	57.0	35.5	70.0	20.0	35.5	50	50	1508
ESWV-42LM 48x2,0 WD	708.2842.992.20	L	160	42	48x2.0	62.5	40.0	80.0	22.0	40.0	60	60	2341
ESWV-06SM 12x1,5 WD	708.2842.195.30	S	400	6	12x1.5	30.5	13.5	27.0	10.0	16.0	19	17	85
ESWV-08SM 14x1,5 WD	708.2842.245.30	S	400	8	14x1.5	30.5	13.5	27.0	10.0	16.0	19	19	103
ESWV-10SM 16x1,5 WD	708.2842.285.30	S	400	10	16x1.5	34.0	16.0	32.5	10.0	18.0	22	22	170
ESWV-12SM 18x1,5 WD	708.2842.333.30	S	400	12	18x1.5	35.5	18.5	37.0	10.0	19.5	24	24	220
ESWV-14SM 20x1,5 WD	708.2842.382.30	S	400	14	20x1.5	39.5	19.5	41.0	12.0	22.0	27	27	280
ESWV-16SM 22x1,5 WD	708.2842.410.30	S	400	16	22x1.5	39.5	21.5	43.0	12.0	21.5	27	30	320
ESWV-20SM 27x2,0 WD	708.2842.506.30	S	315	20	27x2.0	47.5	24.0	48.0	16.0	26.0	32	36	518
ESWV-25SM 33x2,0 WD	708.2842.550.30	S	250	25	33x2.0	55.0	30.5	59.0	18.0	31.0	41	46	1030
ESWV-30SM 42x2,0 WD	708.2842.600.30	S	250	30	42x2.0	63.0	35.5	70.0	20.0	36.5	50	50	1640
ESWV-38SM 48x2,0 WD	708.2842.992.30	S	250	38	48x2.0	71.5	40.5	80.0	22.0	41.0	60	60	2530

L4 ist ein Ungefährmaß bei angezogener Überwurfmutter.

L4 = approximate length with tightened nut.

L4 es una medida aproximada con la tuerca de unión apretada.

Mit gekammertem Weichdichtring.

With bonded seal ring.

Con junta anular blanda protegida.



LEHENGOTAK, S. A.