

Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

Gewinde-Reduzierstutzen


Whitworth-Rohrgewinde - zylindrisch

Reducing adaptors

BSP thread - parallel

Racor de reducción roscado

Rosca Whitworth para tubos - cilíndrica

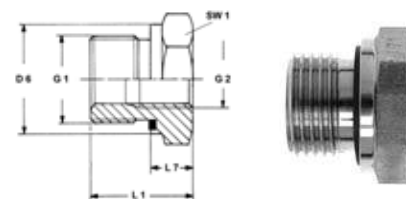

RS-..WD

Type	Mat.-Nr.	PN	D6	G1	G2	L1	L7	SW1	g/Stk
RS-3.8/1.8 WD	708.0416.162	630	21.9	3/8	1/8	22.5	10.5	22	40
RS-1.2/1.8 WD	708.0416.221	630	26.9	1/2	1/8	24.0	10.0	27	65
RS-1.2/1.4 WD	708.0416.224	630	26.9	1/2	1/4	24.0	10.0	27	57
RS-3.4/1.4 WD	708.0416.284	400	31.9	3/4	1/4	26.0	10.0	32	105
RS-3.4/3.8 WD	708.0416.286	400	31.9	3/4	3/8	26.0	10.0	32	94
RS-1.1/1.4 WD	708.0416.406	400	39.9	1	1/4	29.0	11.0	41	195
RS-1.1/3.8 WD	708.0416.407	400	39.9	1	3/8	29.0	11.0	41	177
RS-1.1/1.2 WD	708.0416.408	400	39.9	1	1/2	29.0	11.0	41	155
RS-5.4/1.2 WD	708.0416.488	400	49.9	1 1/4	1/2	32.0	12.0	50	310
RS-5.4/3.4 WD	708.0416.490	400	49.9	1 1/4	3/4	32.0	12.0	50	264
RS-3.2/1.2 WD	708.0416.511	315	54.9	1 1/2	1/2	36.0	14.0	55	470
RS-3.2/3.4 WD	708.0416.513	315	54.9	1 1/2	3/4	36.0	14.0	55	415
RS-3.2/1.1 WD	708.0416.512	315	54.9	1 1/2	1	36.0	14.0	55	342

Abdichtung durch Profilring FPM.

Sealing by capture FPM seal.

Cierre hermético mediante anillo con perfil FPM.



LEHENGOMAK, S. A.

Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

Gewinde-Reduzierstutzen


Whitworth-Rohrgewinde - zylindrisch

Reducing adaptors

BSP thread - parallel

Racor de reducción roscado

Rosca Whitworth para tubos - cilíndrica

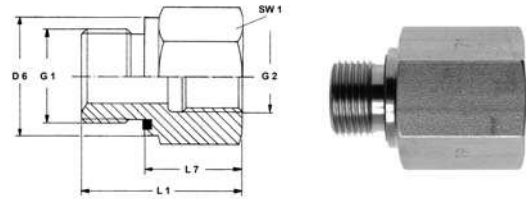

RS...WD

Type	Mat.-Nr.	PN	D6	G1	G2	L1	L7	SW1	g/Stk
RS-1.8/1.4 WD	708.0416.044	630	13.9	1/8	1/4	31.0	23.0	19	30
RS-1.8/3.8 WD	708.0416.046	630	13.9	1/8	3/8	32.0	24.0	24	65
RS-1.4/1.8 WD	708.0416.102	630	18.9	1/4	1/8	28.0	16.0	19	38
RS-1.4/3.8 WD	708.0416.106	630	18.9	1/4	3/8	36.0	24.0	24	68
RS-1.4/1.2 WD	708.0416.108	630	18.9	1/4	1/2	40.0	28.0	27	80
RS-1.4/3.4 WD	708.0416.110	630	18.9	1/4	3/4	43.0	31.0	36	175
RS-3.8/1.4 WD	708.0416.164	630	21.9	3/8	1/4	36.0	24.0	22	70
RS-3.8/1.2 WD	708.0416.168	630	21.9	3/8	1/2	41.0	29.0	27	95
RS-3.8/3.4 WD	708.0416.170	400	21.9	3/8	3/4	44.0	32.0	36	185
RS-1.2/3.8 WD	708.0416.226	630	26.9	1/2	3/8	36.0	22.0	27	100
RS-1.2/3.4 WD	708.0416.232	400	26.9	1/2	3/4	46.0	32.0	36	186
RS-1.2/1.1 WD	708.0416.236	400	26.9	1/2	1	49.0	35.0	41	220
RS-1.2/5.4 WD	708.0416.237	400	26.9	1/2	1 1/4	53.0	39.0	55	487
RS-3.4/1.2 WD	708.0416.288	400	31.9	3/4	1/2	41.0	25.0	32	145
RS-3.4/1.1 WD	708.0416.296	400	31.9	3/4	1	51.0	35.0	41	240
RS-3.4/5.4 WD	708.0416.297	400	31.9	3/4	1 1/4	55.0	39.0	55	525
RS-3.4/3.2 WD	708.0416.298	315	31.9	3/4	1 1/2	57.0	41.0	60	620
RS-1.1/3.4 WD	708.0416.412	400	39.9	1	3/4	47.0	29.0	41	275
RS-1.1/5.4 WD	708.0416.416	400	39.9	1	1 1/4	57.0	39.0	55	520
RS-1.1/3.2 WD	708.0416.417	315	39.9	1	1 1/2	59.0	41.0	60	600
RS-5.4/1.1 WD	708.0416.487	400	49.9	1 1/4	1	52.0	32.0	50	458
RS-5.4/3.2 WD	708.0416.489	315	49.9	1 1/4	1 1/2	60.0	40.0	60	640
RS-3.2/5.4 WD	708.0416.514	315	54.9	1 1/2	1 1/4	58.0	36.0	55	535

Abdichtung durch Profilring FPM.

Sealing by capture FPM seal.

Cierre hermético mediante anillo con perfil FPM.

10