

Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

Gewinde-Reduzierstutzen


Whitworth-Rohrgewinde - zylindrisch

Reducing adaptors

BSP thread - parallel

Racor de reducción roscado

Rosca Whitworth para tubos - cilíndrica

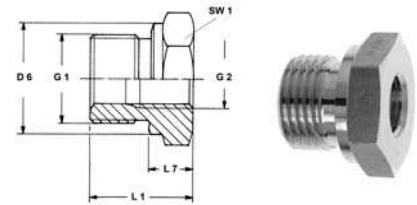

RS-..

Type	Mat.-Nr.	PN	D6	G1	G2	L1	L7	SW1	g/Stk
RS-3.8/1.8	706.0411.162	630	22.0	3/8	1/8	22.5	10.5	22	40
RS-1.2/1.8	706.0411.221	630	26.0	1/2	1/8	24.0	10.0	27	65
RS-1.2/1.4	706.0411.224	630	26.0	1/2	1/4	24.0	10.0	27	57
RS-3.4/1.4	706.0411.284	400	32.0	3/4	1/4	26.0	10.0	32	105
RS-3.4/3.8	706.0411.286	400	32.0	3/4	3/8	26.0	10.0	32	94
RS-1.1/1.4	706.0411.406	400	39.0	1	1/4	29.0	11.0	41	195
RS-1.1/3.8	706.0411.407	400	39.0	1	3/8	29.0	11.0	41	177
RS-1.1/1.2	706.0411.408	400	39.0	1	1/2	29.0	11.0	41	155
RS-5.4/1.2	706.0411.488	400	49.0	1 1/4	1/2	32.0	12.0	50	310
RS-5.4/3.4	706.0411.490	400	49.0	1 1/4	3/4	32.0	12.0	50	264
RS-3.2/1.2	706.0411.511	315	55.0	1 1/2	1/2	36.0	14.0	55	470
RS-3.2/3.4	706.0411.513	315	55.0	1 1/2	3/4	36.0	14.0	55	415
RS-3.2/1.1	706.0411.512	315	55.0	1 1/2	1	36.0	14.0	55	342

Abdichtung durch Dichtkante Form B.

Sealing by stud face form B.

Cierre hermético con junta de obturación forma B.



LEHENGOTAK, S. A.

Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

Gewinde-Reduzierstutzen

Whitworth-Rohrgewinde - zylindrisch


Reducing adaptors

BSP thread - parallel

Racor de reducción roscado

Rosca Whitworth para tubos - cilíndrica

RS-...



Type	Mat.-Nr.	PN	G1	G2	D6	L1	L7	SW1	g/Stk
RS-1.8/1.4	706.0411.044	630	1/8	1/4	14.0	31.0	23.0	19	30
RS-1.8/3.8	706.0411.046	630	1/8	3/8	14.0	32.0	24.0	24	65
RS-1.4/1.8	706.0411.102	630	1/4	1/8	18.0	28.0	16.0	19	38
RS-1.4/3.8	706.0411.106	630	1/4	3/8	18.0	36.0	24.0	24	68
RS-1.4/1.2	706.0411.108	630	1/4	1/2	18.0	40.0	28.0	27	80
RS-1.4/3.4	706.0411.110	630	1/4	3/4	18.0	43.0	31.0	36	175
RS-3.8/1.4	706.0411.164	630	3/8	1/4	22.0	36.0	24.0	22	70
RS-3.8/1.2	706.0411.168	630	3/8	1/2	22.0	41.0	29.0	27	95
RS-3.8/3.4	706.0411.170	400	3/8	3/4	22.0	44.0	32.0	36	185
RS-1.2/3.8	706.0411.226	630	1/2	3/8	26.0	36.0	22.0	27	100
RS-1.2/3.4	706.0411.232	400	1/2	3/4	26.0	46.0	32.0	36	186
RS-1.2/1.1	706.0411.236	400	1/2	1	26.0	49.0	35.0	41	220
RS-1.2/5.4	706.0411.237	400	1/2	1 1/4	26.0	53.0	39.0	55	487
RS-3.4/1.2	706.0411.288	400	3/4	1/2	32.0	41.0	25.0	32	145
RS-3.4/1.1	706.0411.296	400	3/4	1	32.0	51.0	35.0	41	240
RS-3.4/5.4	706.0411.297	400	3/4	1 1/4	32.0	55.0	39.0	55	525
RS-3.4/3.2	706.0411.298	315	3/4	1 1/2	32.0	57.0	41.0	60	620
RS-1.1/3.4	706.0411.412	400	1	3/4	39.0	47.0	29.0	41	275
RS-1.1/5.4	706.0411.416	400	1	1 1/4	39.0	57.0	39.0	55	520
RS-1.1/3.2	706.0411.417	315	1	1 1/2	39.0	59.0	41.0	60	600
RS-5.4/1.1	706.0411.487	400	1 1/4	1	49.0	52.0	32.0	50	158
RS-5.4/3.2	706.0411.489	315	1 1/4	1 1/2	49.0	60.0	40.0	60	640
RS-3.2/5.4	706.0411.514	315	1 1/2	1 1/4	55.0	58.0	36.0	55	535

Abdichtung durch Dichtkante Form B.

Sealing by stud face form B.

Cierre hermético con junta de obturación forma B.