




LEHENGOTAK, S.A.

SERIE BVS2 AISI316 2 VIAS / 2 WAY



TEMPERATURA DE TRABAJO
WORKING TEMPERATURE
-15°C / +180°C (VITON)



PRESTION DE TRABAJO (BAR) / WORKING PRESSURE (BAR)

06	10	13	20	25	32	40	50
500	500	500	315	315	315		

APLICACIONES OLEO HIDRAULICAS
OIL HIDRAULIC APPLICATIONS



INDUSTRIA NAVAL

MARINE INDUSTRY



INDUSTRIA QUIMICA

CHEMICAL INDUSTRY



INDUSTRIA ALIMENTARIA

FOOD INDUSTRY



INSTALACIONES VAPOR

STEAM INSTALLATIONS




MAQUINARIA INDUSTRIAL

INDUSTRIAL MACHINERY



PROCESOS INDUSTRIALES


INDUSTRIAL PROCESSES



DASH		BSP
06	1/4"	A14.BVS2.21206AB
10	3/8"	A14.BVS2.21210AC
12	1/2"	A14.BVS2.21213AD
19	3/4"	A14.BVS2.21220AE
25	1"	A14.BVS2.21225AF
32	1.1/4"	A14.BVS2.21232AG
40	1.1/2"	BAJO DEMANDA / UNDER REQUEST
50	2"	BAJO DEMANDA / UNDER REQUEST

Otras roscas y medidas bajo demanda.

Other threads and sizes under request.

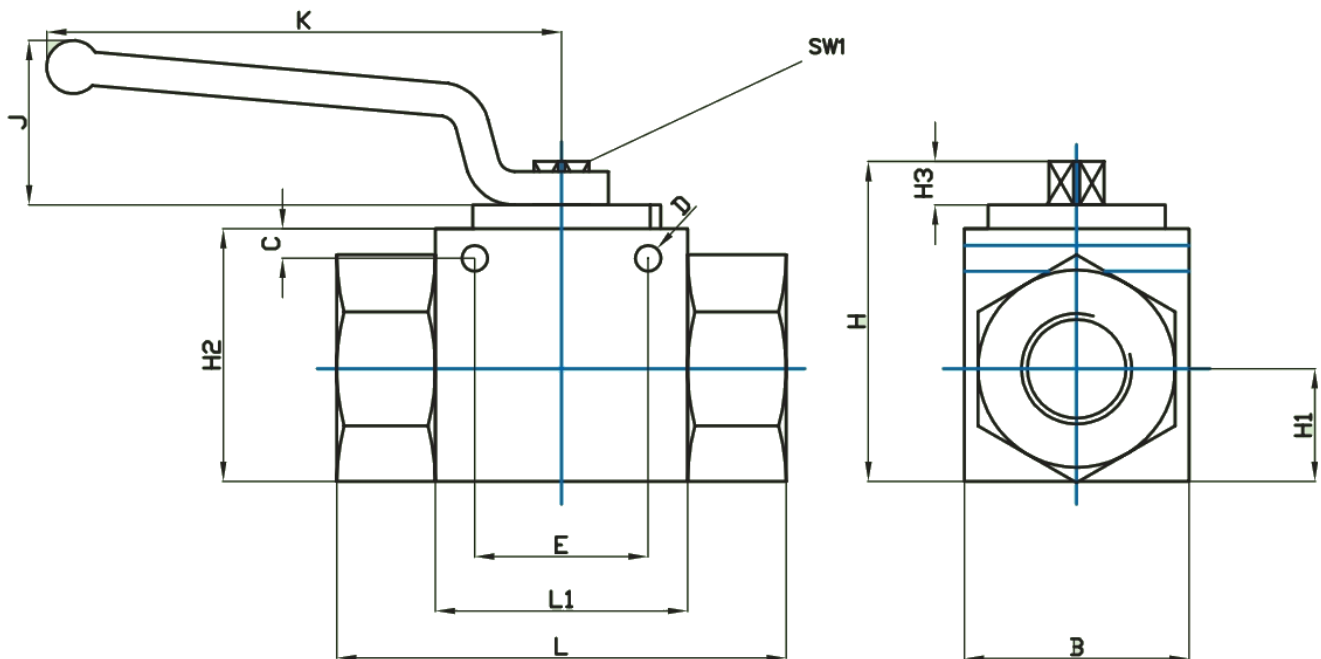

Todas las dimensiones indicadas son como referencia, en casos críticos contacten con nosotros.

All dimensions shown are for guidance only, if critical contact us.

BSP	DASH	L mm	L1 mm	B mm	H mm	H1 mm	H2 mm	H3 mm	E mm	D mm	SW1 mm	K mm	J mm
1/4"	06	69	37	28	44,5	13	32	8	26	5	9	135	40
3/8"	10	72	42	35	52,5	17	40	8	32	5	9	135	40
1/2"	12	83	48	35	52,5	17	40	8	37,5	4,8	9	135	40
3/4"	19	95	60	48	75	24	57	12	45	6,5	14	181	61
1"	25	113	65	57	82	28,5	64	12	55	6	14	181	61
1.1/4"	32	110	84	75	104,5	37,5	84	14	55	6	17	221	75



LEHENGOTAK, S.A.