




STUF-SAE




Valvole di controllo flusso unidirezionali
Unidirectional flow control valves



LEHENGOMK, S. A.




Dati tecnici Technical data	
Viscosità fluido Fluid viscosity	10-500 mm ² /s 45 to 2000 ssu (6 to 420 cSt)
Classe di contaminazione Filtration	ISO code 16/13 SAE class 4 or better
Temperatura fluido Fluid temperature	-20°C +80°C -4°F +176°F
Temperatura ambiente Ambient temperature	-20°C +50°C -4°F +122°F

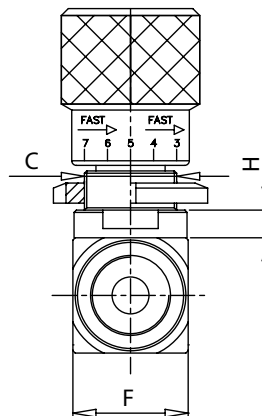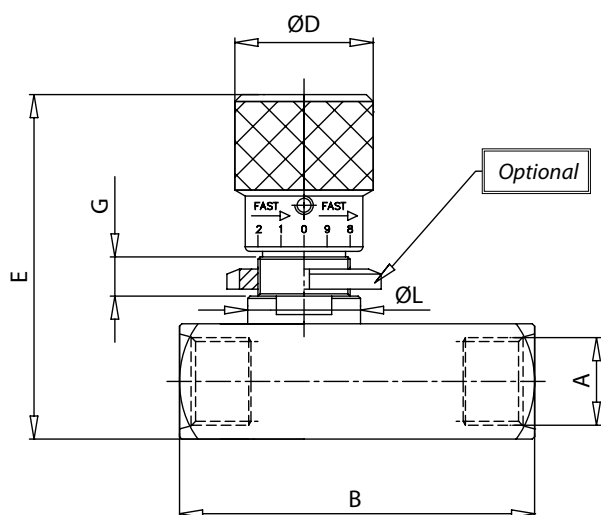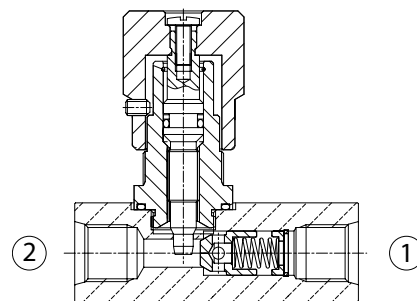

Codice ordinazione Ordering code	
STUF-X-SAE	
X	Dimensione / Size
4	7/16 - 20UNF
6	9/16 - 18UNF
8	3/4 - 16UNF
12	1 - 1/16 - 12UNF
16	1 - 5/16 - 12UNF

mm
(Inches)

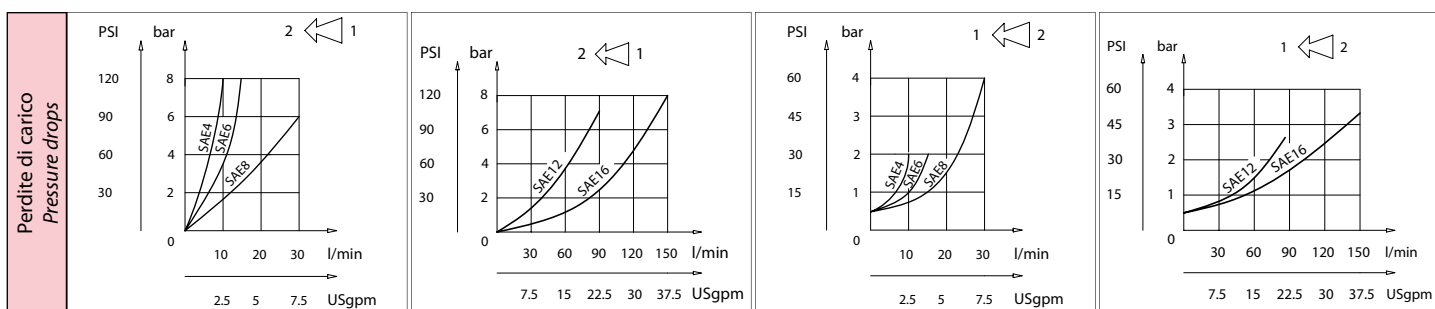

Caratteristiche tecniche Technical performances

Codice Code	A	Portata Max Max flow l/min - USgpm	Pressione Max Max pressure bar/PSI	B	C	D	E	F	G	H	L	Optional Code	Peso approssimativo Approx weight Kg / lb
STUF4SAE	7/16 - 20UNF	15 (4)	400 (5800)	66 (2.60)	M20x1	30 (1.18)	75 (2.95)	25 (0.98)	7,5 (0.29)	6 (0.23)	24,5 (0.96)	84100022	0,41 (0.90)
STUF6SAE	9/16 - 18UNF	30 (8)		70,5 (2.78)									0,42 (0.93)
STUF8SAE	3/4 - 16UNF	50 (13)		91 (3.58)	M25x1,5	33 (1.30)	81 (3.19)	30 (1.18)	9 (0.35)	7 (0.27)	29,5 (1.16)	84100023	0,63 (1.40)
STUF12SAE	1 - 1/16 - 12UNF	80 (21)		112,5 (4.43)									1,40 (3.10)
STUF16SAE	1 - 5/16 - 12UNF	150 (40)		141 (5.55)	M35x1,5	42 (1.65)	110 (4.33) 115 (4.53)	40 (1.57) 45 (1.77)	15,5 (0.61)	8 (0.31)	39,5 (1.55)	84100024	2 (4.40)



LEHENGOMK, S. A.