

Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

Verschlussstopfen

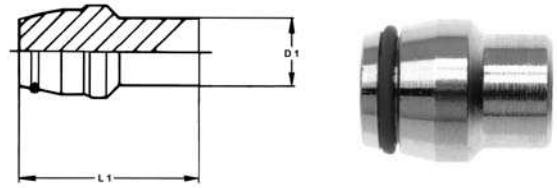
mit O-Ring-Abdichtung - FPM

Blanking plugs with o-ring

with o-ring sealing - FPM

Tapón con junta tórica

con cierre de junta tórica - FPM

VME-..L/S


Type	Mat.-Nr.	Serie	PN	D1	L1	g/Stk
VME-06L/S	708.0020.060.13	L/S	630	6	17.5	14
VME-08L/S	708.0020.080.13	L/S	630	8	18.5	17
VME-10L/S	708.0020.100.13	L/S	630	10	19.5	21
VME-12L/S	708.0020.120.13	L/S	630	12	19.5	25
VME-15L	708.0020.150.20	L	315	15	19.5	35
VME-18L	708.0020.180.20	L	315	18	20.0	45
VME-22L	708.0020.220.20	L	160	22	20.5	67
VME-28L	708.0020.280.20	L	160	28	21.5	100
VME-35L	708.0020.350.20	L	160	35	23.5	196
VME-42L	708.0020.420.20	L	160	42	25.0	257
VME-14S	708.0020.140.30	S	630	14	20.0	27
VME-16S	708.0020.160.30	S	400	16	21.0	37
VME-20S	708.0020.200.30	S	400	20	24.0	62
VME-25S	708.0020.250.30	S	400	25	25.0	108
VME-30S	708.0020.300.30	S	400	30	26.5	160
VME-38S	708.0020.380.30	S	315	38	30.0	231

 passend in 24°-Innenkonus
 (Bohrungsform W DIN 3861)

 fitting type 24° inside tapers
 (bore type W DIN 3861)

 encaja en cono interior de 24°
 (forma de taladro W DIN 3861)

LEHENGOMAK, S.A.