

Verschlusschrauben


mit Innensechskant

Locking screws

with internal hexagon

Tornillos de cierre

con hexágono interior

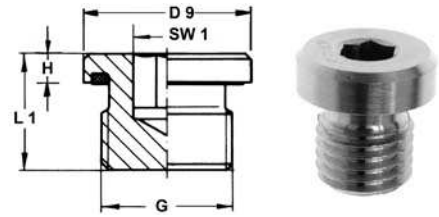

VSI-..RWD

Type	Mat.-Nr.	D9	G	H	L1	SW1	g/Stk
VSI-R1.8 WD	708.0722.020	13.9	1/8	4.0	12.0	5	6
VSI-R1.4 WD	708.0722.040	18.9	1/4	5.0	17.0	6	16
VSI-R3.8 WD	708.0722.060	21.9	3/8	5.0	17.0	8	29
VSI-R1.2 WD	708.0722.080	26.9	1/2	5.0	19.0	10	42
VSI-R3.4 WD	708.0722.120	31.9	3/4	5.0	21.0	12	76
VSI-R1.1 WD	708.0722.160	39.9	1	6.5	22.5	17	120
VSI-R5.4 WD	708.0722.180	49.9	1 1/4	6.5	22.5	22	186
VSI-R3.2 WD	708.0722.200	54.9	1 1/2	6.5	22.5	24	256

Abdichtung durch Profildichtung FPM.

FPM soft seal design

Cierre hermético mediante junta con perfil FPM.

10

