

Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

T-Einschraubverschraubungen


Einschraubgewinde: Whitworth-Rohrgewinde - zylindrisch

Equal tees, male

Stud thread: BSP thread - parallel

Racores para roscar T

Rosca de conexión: Rosca Whitworth para tubos - cilíndrica

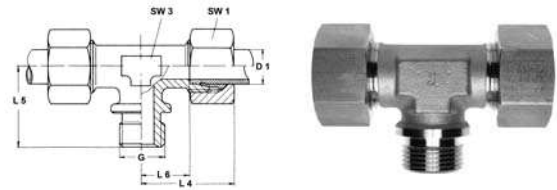

TEV-..LR/SR

Type	Mat.-Nr.	Serie	PN	D1	G	L4	L5	L6	SW1	SW3	g/Stk
TEV-22LR 3.4	708.3702.768.20	L	160	22	3/4	44.0	42.0	27.5	36	27	381
TEV-28LR 1.1	708.3702.850.20	L	160	28	1	47.0	48.0	30.5	41	36	544
TEV-35LR 5.4	708.3702.944.20	L	160	35	1 1/4	56.0	54.0	34.5	50	41	931
TEV-42LR 3.2	708.3702.992.20	L	160	42	1 1/2	63.0	61.0	40.0	60	50	1408
TEV-20SR 3.4	708.3702.704.30	S	400	20	3/4	48.0	42.0	26.5	36	27	499
TEV-25SR 1.1	708.3702.810.30	S	400	25	1	54.0	48.0	30.0	46	36	921
TEV-30SR 5.4	708.3702.902.30	S	400	30	1 1/4	62.0	54.0	35.5	50	41	1217
TEV-38SR 3.2	708.3702.953.30	S	315	35	1 1/2	72.0	61.0	41.0	60	50	1722

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.

Abdichtung durch Dichtkante Form B.

Sealing by stud face form B.

Cierre hermético con junta de obturación forma B.



LEHENGOMAK, S. A.