

Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

T-Einschraubverschraubungen


Einschraubgewinde: Metrisches Gewinde - zylindrisch

Equal tees, male

Stud thread: metric - parallel

Racores para roscar T

Rosca de conexión: Rosca métrica - cilíndrica

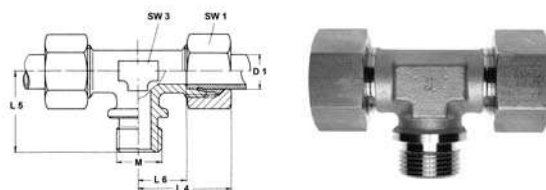

TEV-..LM/SM

Type	Mat.-Nr.	Serie	PN	D1	M	L4	L5	L6	SW1	SW3	g/Stk
TEV-22LM 26x1,5	708.3743.535.20	L	160	22	26x1.5	44.0	42.0	27.5	36	27	381
TEV-28LM 33x2,0	708.3743.570.20	L	160	28	33x2.0	47.0	48.0	30.5	41	36	544
TEV-35LM 42x2,0	708.3743.600.20	L	160	35	42x2.0	56.0	54.0	34.5	50	41	931
TEV-42LM 48x2,0	708.3743.992.20	L	160	42	48x2.0	63.0	61.0	40.0	60	50	1408
TEV-20SM 27x2,0	708.3743.506.30	S	400	20	27x2.0	48.0	42.0	26.5	36	27	499
TEV-25SM 33x2,0	708.3743.550.30	S	400	25	33x2.0	54.0	48.0	30.0	46	36	921
TEV-30SM 42x2,0	708.3743.590.30	S	400	30	42x2.0	62.0	54.0	35.5	50	41	1217
TEV-38SM 48x2,0	708.3743.954.30	S	315	38	48x2.0	72.0	61.0	41.0	60	50	1722

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.

Abdichtung durch Dichtkante Form B.

Sealing by stud face form B.

Cierre hermético con junta de obturación forma B.



LEHENGOTAK, S. A.