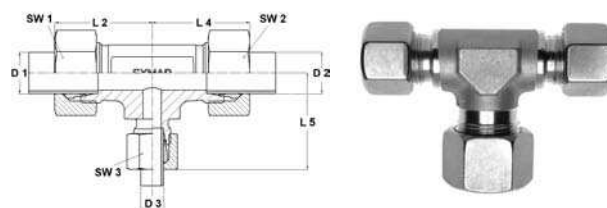


T-Reduzierverschraubungen

T-Reducing fittings

Racores de reducción T


TR-..L/S

Type	Mat.-Nr.	Serie	PN	D1	D2	D3	L2	L4	L5	SW1	SW2	SW3	g/Stk
TR-06/08/06L	708.3004.058.20	L	315	6	6	8	21.0	21.0	21.0	14	14	17	
TR-06/10/06L	708.3004.061.20	L	315	6	6	10	22.0	22.0	22.0	14	14	19	
TR-08/06/08L	708.3004.093.20	L	315	8	8	6	21.0	21.0	21.0	17	17	14	46
TR-08/10/08L	708.3004.104.20	L	315	8	8	10	22.0	22.0	22.0	17	17	19	
TR-10/06/10L	708.3004.147.20	L	315	10	10	6	22.0	22.0	22.0	19	19	14	
TR-10/08/10L	708.3004.153.20	L	315	10	10	8	22.0	22.0	21.0	19	19	17	
TR-10/10/08L	708.3004.160.20	L	315	10	8	10	22.0	22.0	22.0	19	17	19	
TR-10/15/10L	708.3004.175.20	L	315	10	10	15	24.0	24.0	28.0	19	19	27	
TR-12/08/12L	708.3004.210.20	L	315	12	12	8	24.0	24.0	23.0	22	12	17	
TR-12/10/12L	708.3004.222.20	L	315	12	12	10	24.0	24.0	24.0	22	22	19	
TR-12/12/10L	708.3004.232.20	L	315	12	10	12	24.0	24.0	24.0	22	19	22	
TR-12/18/12L	708.3004.258.20	L	315	12	12	18	24.0	24.0	31.0	22	22	32	
TR-15/12/15L	708.3004.422.20	L	315	15	15	12	28.0	28.0	28.0	27	27	22	
TR-18/10/18L	708.3004.584.20	L	315	18	18	10	31.0	31.0	31.0	32	32	19	178
TR-18/12/18L	708.3004.599.20	L	315	18	18	12	31.0	31.0	31.0	32	32	22	
TR-18/18/10L	708.3004.637.20	L	315	18	10	18	31.0	31.0	31.0	32	19	32	174
TR-22/10/22L	708.3004.738.20	L	160	22	22	10	35.0	35.0	30.0	36	36	19	
TR-22/12/22L	708.3004.740.20	L	160	22	22	12	35.0	35.0	35.0	36	36	22	
TR-22/15/22L	708.3004.800.20	L	160	22	22	15	35.0	35.0	31.0	36	36	27	
TR-22/18/22L	708.3004.862.20	L	160	22	22	18	35.0	35.0	31.0	36	36	32	
TR-28/10/28L	708.3004.906.20	L	160	28	28	10	38.0	38.0	38.0	41	41	19	
TR-28/12/28L	708.3004.916.20	L	160	28	28	12	38.0	38.0	38.0	41	41	22	
TR-28/18/28L	708.3004.928.20	L	160	28	28	18	38.0	38.0	31.0	41	41	32	
TR-28/22/28L	708.3004.948.20	L	160	28	28	22	38.0	38.0	35.0	41	41	36	
TR-35/12/35L	708.3004.975.20	L	160	35	35	12	45.0	45.0	41.5	50	50	22	
TR-42/28/42L	708.3004.987.20	L	160	42	42	28	51.0	51.0	45.0	60	60	41	
TR-42/35/42L	708.3004.988.20	L	160	42	42	35	51.0	51.0	50.5	60	60	50	
TR-06/12/06S	708.3004.065.30	S	630	6	6	12	29.0	29.0	29.0	17	17	24	
TR-12/16/12S	708.3004.256.30	S	630	12	12	16	33.0	33.0	33.0	24	24	30	110
TR-16/10/16S	708.3004.454.30	S	400	16	16	10	33.0	33.0	33.0	30	30	22	
TR-16/12/16S	708.3004.455.30	S	400	16	16	12	33.0	33.0	33.0	30	30	24	
TR-20/08/20S	708.3004.668.30	S	400	20	20	8	37.0	37.0	35.0	36	36	19	
TR-20/14/20S	708.3004.692.30	S	400	20	20	14	37.0	37.0	37.0	36	36	27	
TR-25/06/25S	708.3004.898.30	S	400	25	25	6	42.0	42.0	42.0	46	46	17	
TR-25/10/25S	708.3004.899.30	S	400	25	25	10	42.0	42.0	42.0	46	46	22	
TR-25/16/25S	708.3004.900.30	S	400	25	25	16	42.0	42.0	42.0	46	46	30	498
TR-30/16/30S	708.3004.970.30	S	400	30	30	16	49.0	49.0	45.0	50	50	30	
TR-30/06/30S	708.3004.969.30	S	400	30	30	6	49.0	49.0	42.0	50	50	17	
TR-38/06/38S	708.3004.979.30	S	315	38	38	6	57.0	57.0	47.0	60	60	17	

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.



LEHENGOTAK, S.A.