

## Einstellbare Winkerverschraubungen


Einschraubgewinde: Whitworth-Rohrgewinde - zylindrisch

## Adjustable male stud elbows

Stud thread: BSP thread - parallel

## Racores angulares ajustables

Rosca de conexión: Rosca Witworth para tubos - cilíndrica

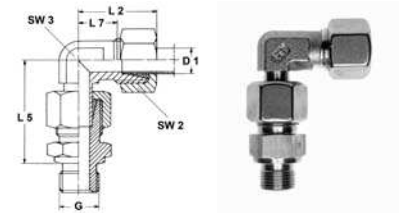

### EWV-..LR/SR

Type	Mat.-Nr.	Serie	PN	D1	G	L2	L5	L7	SW2	SW3	g/Stk
EWV-06LR 1.8	708.2621.100.20	L	315	6	1/8	27.0	34.5	12.0	14	12	57
EWV-08LR 1.4	708.2621.170.20	L	315	8	1/4	29.0	37.0	14.0	17	12	82
EWV-10LR 1.4	708.2621.270.20	L	315	10	1/4	30.0	39.5	15.0	19	14	96
EWV-12LR 1.4	708.2621.380.20	L	315	12	1/4	32.0	40.5	17.0	22	17	126
EWV-12LR 3.8	708.2621.390.20	L	315	12	3/8	32.0	41.5	17.0	22	17	134
EWV-12LR 1.2	708.2621.400.20	L	315	12	1/2	32.0	42.5	17.0	22	17	164
EWV-15LR 1.2	708.2621.534.20	L	315	15	1/2	36.0	46.0	21.0	27	19	229
EWV-18LR 1.2	708.2621.646.20	L	315	18	1/2	40.0	49.5	23.5	32	24	305
EWV-22LR 3.4	708.2621.768.20	L	160	22	3/4	44.0	54.5	27.5	36	27	415
EWV-28LR 1.1	708.2621.850.20	L	160	28	1	47.0	59.0	30.5	41	36	614
EWV-35LR 5.4	708.2621.944.20	L	160	35	1 1/4	56.0	68.5	34.5	50	41	984
EWV-42LR 3.2	708.2621.992.20	L	160	42	1 1/2	63.0	75.5	40.0	60	50	1417
EWV-06SR 1.4	708.2621.110.30	S	630	6	1/4	31.0	40.0	16.0	17	12	99
EWV-08SR 1.4	708.2621.170.30	S	630	8	1/4	32.0	42.0	17.0	19	14	121
EWV-10SR 3.8	708.2621.280.30	S	630	10	3/8	34.0	44.5	17.5	22	17	169
EWV-12SR 3.8	708.2621.390.30	S	630	12	3/8	38.0	47.5	21.5	24	17	222
EWV-12SR 1.2	708.2621.400.30	S	630	12	1/2	38.0	47.5	21.5	24	17	234
EWV-14SR 1.2	708.2621.504.30	S	630	14	1/2	40.0	53.5	22.0	27	19	287
EWV-16SR 1.2	708.2621.566.30	S	400	16	1/2	43.0	54.5	24.5	30	24	339
EWV-20SR 3.4	708.2621.708.30	S	400	20	3/4	48.0	64.5	26.5	36	27	551
EWV-25SR 1.1	708.2621.810.30	S	400	25	1	54.0	72.5	30.0	46	36	1054
EWV-30SR 5.4	708.2621.902.30	S	400	30	1 1/4	62.0	78.5	35.5	50	41	1398
EWV-38SR 3.2	708.2621.953.30	S	315	38	1 1/2	72.0	89.0	41.0	60	50	1987

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.

Abdichtung durch Dichtkante Form B.

Sealing by stud face form B.

Cierre hermético con junta de obturación forma B.

