

## Einstellbare Winkerverschraubungen

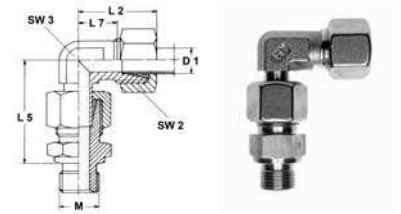
Einschraubgewinde: Metrisches Gewinde - zylindrisch

## Adjustable male stud elbows

Stud thread: metric - parallel

## Racores angulares ajustables

Rosca de conexión: Rosca métrica - cilíndrica


**EWV-..LM/SM**

Type	Mat.-Nr.	Serie	PN	D1	M	L2	L5	L7	SW2	SW3	g/Stk
EWV-06LM 10x1,0	708.2622.180.20	L	315	6	10x1.0	27.0	34.5	12.0	14	12	57
EWV-08LM 12x1,5	708.2622.240.20	L	315	8	12x1.5	29.0	37.0	14.0	17	12	82
EWV-10LM 14x1,5	708.2622.280.20	L	315	10	14x1.5	30.0	39.5	15.0	19	14	96
EWV-12LM 16x1,5	708.2622.330.20	L	315	12	16x1.5	32.0	41.5	17.0	22	17	134
EWV-15LM 18x1,5	708.2622.390.20	L	315	15	18x1.5	36.0	45.5	21.0	27	19	229
EWV-18LM 22x1,5	708.2622.460.20	L	315	18	22x1.5	40.0	49.5	23.5	32	24	305
EWV-22LM 26x1,5	708.2622.535.20	L	160	22	26x1.5	44.0	54.5	27.5	36	27	415
EWV-28LM 33x2,0	708.2622.570.20	L	160	28	33x2.0	47.0	59.0	30.5	41	36	614
EWV-35LM 42x2,0	708.2622.600.20	L	160	35	42x2.0	56.0	68.5	34.5	50	41	984
EWV-42LM 48x2,0	708.2622.992.20	L	160	42	48x2.0	63.0	75.5	40.0	60	50	1417
EWV-06SM 12x1,5	708.2622.190.30	S	630	6	12x1.5	31.0	40.0	16.0	17	12	99
EWV-08SM 14x1,5	708.2622.245.30	S	630	8	14x1.5	32.0	42.0	17.0	19	14	121
EWV-10SM 16x1,5	708.2622.285.30	S	630	10	16x1.5	34.0	44.5	17.5	22	17	169
EWV-12SM 18x1,5	708.2622.333.30	S	630	12	18x1.5	38.0	47.5	21.5	24	17	222
EWV-14SM 20x1,5	708.2622.382.30	S	630	14	20x1.5	40.0	53.5	22.0	27	19	287
EWV-16SM 22x1,5	708.2622.410.30	S	400	16	22x1.5	43.0	54.5	24.5	30	24	339
EWV-20SM 27x2,0	708.2622.506.30	S	400	20	27x2.0	48.0	64.5	26.5	36	27	551
EWV-25SM 33x2,0	708.2622.550.30	S	400	25	33x2.0	54.0	72.5	30.0	46	36	1054
EWV-30SM 42x2,0	708.2622.590.30	S	400	30	42x2.0	62.0	78.5	35.5	50	41	1398
EWV-38SM 48x2,0	708.2622.954.30	S	315	38	48x2.0	72.0	89.0	41.0	60	50	1987

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.

Abdichtung durch Dichtkante Form B.

Sealing by stud face form B.

Cierre hermético con junta de obturación forma B.


**LEHENGOTAK, S.A.**