

**Winkel-Einschraubverschraubungen**


Einschraubgewinde: NPT

**Elbows, male**

Stud thread: NPT

**Racores para roscar en codo**

Rosca de conexión: NPT

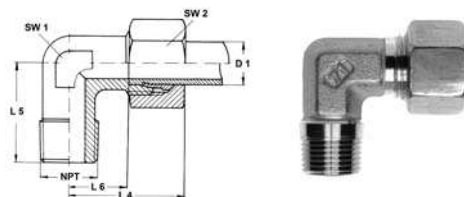

**WEV-..L-NPT**

Type	Mat.-Nr.	Serie	PN	D1	NPT	L4	L5	L6	SW1	SW2	g/Stk
WEV-04LLNPT 1.8	708.2402.060.10	LL	100	4	1/8	21.0	17.0	11.0	9	10	20
WEV-06LLNPT 1.8	708.2402.100.10	LL	100	6	1/8	21.0	17.0	9.5	9	12	23
WEV-08LLNPT 1.8	708.2402.160.10	LL	100	8	1/8	23.0	20.0	11.0	12	14	33
WEV-06LNPT 1.8	708.2402.100.20	L	315	6	1/8	27.0	20.0	12.0	12	14	42
WEV-06LNPT 1.4	708.2402.110.20	L	315	6	1/4	27.0	25.0	12.0	12	14	45
WEV-06LNPT 3.8	708.2402.120.20	L	315	6	3/8	27.0	28.0	12.0	14	14	60
WEV-08LNPT 1.8	708.2402.160.20	L	315	8	1/8	29.0	24.0	14.0	12	17	67
WEV-08LNPT 1.4	708.2402.170.20	L	315	8	1/4	29.0	26.0	14.0	12	17	67
WEV-08LNPT 3.8	708.2402.180.20	L	315	8	3/8	29.0	26.0	14.0	14	17	62
WEV-08LNPT 1.2	708.2402.185.20	L	315	8	1/2	29.0	34.0	14.0	17	17	104
WEV-10LNPT 1.4	708.2402.270.20	L	315	10	1/4	30.0	27.0	15.0	14	19	85
WEV-10LNPT 3.8	708.2402.280.20	L	315	10	3/8	32.0	28.0	17.0	14	19	98
WEV-10LNPT 1.2	708.2402.285.20	L	315	10	1/2	30.0	34.0	15.0	17	19	100
WEV-12LNPT 1.4	708.2402.380.20	L	315	12	1/4	32.0	28.0	17.0	17	22	114
WEV-12LNPT 3.8	708.2402.390.20	L	315	12	3/8	32.0	28.0	17.0	17	22	120
WEV-12LNPT 1.2	708.2402.400.20	L	315	12	1/2	32.0	34.0	17.0	17	22	131
WEV-15LNPT 1.2	708.2402.534.20	L	315	15	1/2	36.0	34.0	21.0	19	27	144
WEV-18LNPT 3.4	708.2402.648.20	L	315	18	3/4	38.5	41.0	22.0	24	32	200
WEV-18LNPT 1.2	708.2402.646.20	L	315	18	1/2	40.0	36.0	23.5	24	32	171
WEV-22LNPT 3.4	708.2402.768.20	L	160	22	3/4	44.0	42.0	27.5	27	36	237
WEV-28LNPT 1.1	708.2402.850.20	L	160	28	1	47.0	48.0	30.5	36	41	384
WEV-35LNPT 5.4	708.2402.944.20	L	160	35	1 1/4	56.0	54.0	34.5	41	50	587
WEV-42LNPT 3.2	708.2402.992.20	L	160	42	1 1/2	63.0	61.0	40.0	50	60	845

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.