

Winkel-Einschraubverschraubungen

Einschraubgewinde: Whitworth-Rohrgewinde - kegelig


Elbows, male

Stud thread: BSP thread - taper

Racores para roscar en codo

Rosca de conexión: Rosca Whitworth para tubos - cónica

WEV-..LRK

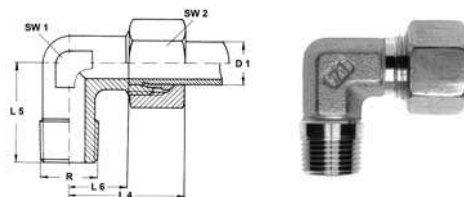

Type	Mat.-Nr.	Serie	PN	D1	R	L4	L5	L6	SW1	SW2	g/Stk
● WEV-04LRK 1.8	708.2401.060.10	LL	100	4	1/8	21.0	17.0	11.0	9	10	21
● WEV-06LRK 1.8	708.2401.100.10	LL	100	6	1/8	21.0	17.0	9.5	9	12	27
● WEV-08LRK 1.8	708.2401.160.10	LL	100	8	1/8	23.0	20.0	11.5	12	14	32
● WEV-06LRK 1.8	708.2401.100.20	L	315	6	1/8	26.5	20.0	12.0	12	14	34
WEV-06LRK 1.4	708.2401.110.20	L	315	6	1/4	26.5	24.0	12.0	12	14	57
WEV-06LRK 3.8	708.2401.120.20	L	315	6	3/8	30.0	27.0	15.0	14	14	58
WEV-08LRK 1.8	708.2401.160.20	L	315	8	1/8	28.5	26.0	14.0	12	17	53
● WEV-08LRK 1.4	708.2401.170.20	L	315	8	1/4	28.5	26.0	14.0	12	17	60
WEV-08LRK 3.8	708.2401.180.20	L	315	8	3/8	29.5	27.0	15.0	14	17	82
WEV-08LRK 1.2	708.2401.185.20	L	315	8	1/2	31.5	30.0	16.0	17	17	95
WEV-10LRK 1.8	708.2401.265.20	L	315	10	1/8	30.0	28.0	15.0	14	19	
● WEV-10LRK 1.4	708.2401.270.20	L	315	10	1/4	29.5	27.0	15.0	14	19	55
WEV-10LRK 3.8	708.2401.280.20	L	315	10	3/8	30.0	28.0	15.0	14	19	63
WEV-10LRK 1.2	708.2401.285.20	L	315	10	1/2	29.5	30.0	15.0	19	19	90
WEV-12LRK 1.4	708.2401.380.20	L	315	12	1/4	32.0	28.0	17.0	17	22	74
● WEV-12LRK 3.8	708.2401.390.20	L	315	12	3/8	32.0	28.0	17.0	17	22	75
WEV-12LRK 1.2	708.2401.400.20	L	315	12	1/2	36.0	32.0	21.0	19	22	110
● WEV-15LRK 1.2	708.2401.534.20	L	315	15	1/2	36.0	34.0	21.0	19	27	134
WEV-15LRK 3.8	708.2401.532.20	L	315	15	3/8	36.0	28.0	21.0	19	27	
● WEV-18LRK 1.2	708.2401.646.20	L	315	18	1/2	40.0	36.0	23.5	24	32	190
WEV-18LRK 3.4	708.2401.648.20	L	315	18	3/4	40.0	36.0	23.5	24	32	190
WEV-22LRK 3.4	708.2401.768.20	L	160	22	3/4	44.0	41.0	27.5	27	36	

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.