






VSC6

Valvole di controllo flusso compensate fisse
Fixed compensated flow control valves

LEHENGOMAK S.p.A.

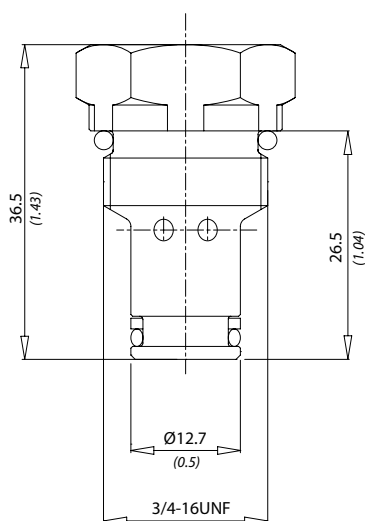

Dati tecnici Technical data

Viscosità fluido Fluid viscosity	10-500 mm ² /s 45 to 2000 ssu (6 to 420 cSt)
Classe di contaminazione Filtration	ISO code 16/13 SAE class 4 or better
Temperatura fluido Fluid temperature	-20°C +80°C -4°F +176°F
Temperatura ambiente Ambient temperature	-20°C +50°C -4°F +122°F

Caratteristiche tecniche Technical performances

Codice Code	Portata Max Max flow l/min - USgpm	Pressione Max Max pressure bar/PSI	Peso approssimativo Approx weight Kg / lb	Coppia di serraggio Tightening torque Nm / lbf ft	Cavità Cavity
VSC6	12 (3)	250 (3600)	0,06 (0.15)	25-30 (19-22)	SAE8/2

mm
(Inches)

Codice Code	Ø C
VSC61	Ø 0,8 (Ø 0.031)
VSC62	Ø 1 (Ø 0.039)
VSC63	Ø 1,25 (Ø 0.049)
VSC64	Ø 1,5 (Ø 0.059)
VSC65	Ø 1,75 (Ø 0.069)
VSC66	Ø 1,8 (Ø 0.071)
VSC67	Ø 1,9 (Ø 0.075)
VSC68	Ø 2 (Ø 0.079)
VSC69	Ø 2,1 (Ø 0.083)
VSC610	Ø 2,25 (Ø 0.088)
VSC611	Ø 2,5 (Ø 0.098)
VSC612	Ø 2,6 (Ø 0.10)

Codice ordinazione Ordering code

VSC6 - Y


Y	Portata controllata a 100 bar ± 10% Controlled flow at 100 bar ± 10 %
1	1 l/min (0.25 USgpm)
2	2 l/min (0.5 USgpm)
3	3 l/min (0.75 USgpm)
4	4 l/min (1 USgpm)
5	5 l/min (1.25 USgpm)
6	6 l/min (1.5 USgpm)
7	7 l/min (1.75 USgpm)
8	8 l/min (2 USgpm)
9	9 l/min (2.25 USgpm)
10	10 l/min (2.5 USgpm)
11	11 l/min (2.75 USgpm)
12	12 l/min (3 USgpm)



VCF6

Valvole di controllo flusso compensate regolabili
Adjustable compensated flow control valves




LEHENGOMAK S.p.A.

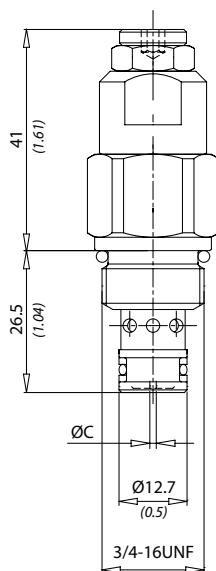

Dati tecnici Technical data

Viscosità fluido Fluid viscosity	10-500 mm ² /s 45 to 2000 ssu (6 to 420 cSt)
Classe di contaminazione Filtration	ISO code 16/13 SAE class 4 or better
Temperatura fluido Fluid temperature	-20°C +80°C -4°F +176°F
Temperatura ambiente Ambient temperature	-20°C +50°C -4°F +122°F

mm
(Inches)

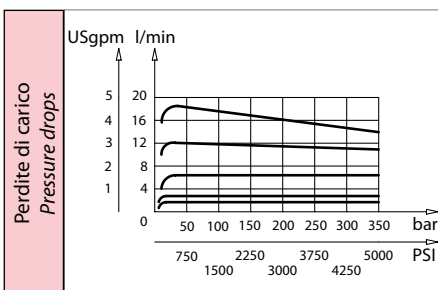

Caratteristiche tecniche Technical performances

Codice Code	Portata Max Max flow l/min - USgpm	Pressione Max Max pressure bar/PSI	Peso approssimativo Approx weight Kg / lb	Coppia di serraggio Tightening torque Nm / lbf ft	Cavità Cavity
VCF6	18 (5)	350 (5000)	0,11 (0.25)	25-30 (19-22)	SAE8/2

Codice ordinazione Ordering code

VCF6 - X - Y

X	Regolazione / Setting	Y	Portata controllata a 100 bar ± 10% Controlled flow at 100 bar ± 10 %
C		1	0,8 - 1,9 l/min (0.2 - 0.5 USgpm)
		2	1 - 2,2 l/min (0.25 - 0.6 USgpm)
		3	1,6 - 4 l/min (0.4 - 1 USgpm)
V		4	2,5 - 5 l/min (0.6 - 1.3 USgpm)
		5	3 - 7 l/min (0.8 - 1.8 USgpm)
		6	4,9 - 10,8 l/min (1.3 - 2.8 USgpm)
		7	8 - 18,5 l/min (2.1 - 4.9 USgpm)

LEHENGOMAK S.p.A.