



VUR-SAE

Valvole unidirezionali
Check valves






LEHENGOTEK, S. A.





Dati tecnici Technical data

Viscosità fluido Fluid viscosity	10-500 mm ² /s 45 to 2000 ssu (6 to 420 cSt)
Classe di contaminazione Filtration	ISO code 16/13 SAE class 4 or better
Temperatura fluido Fluid temperature	-20°C +80°C -4°F +176°F
Temperatura ambiente Ambient temperature	-20°C +50°C -4°F +122°F

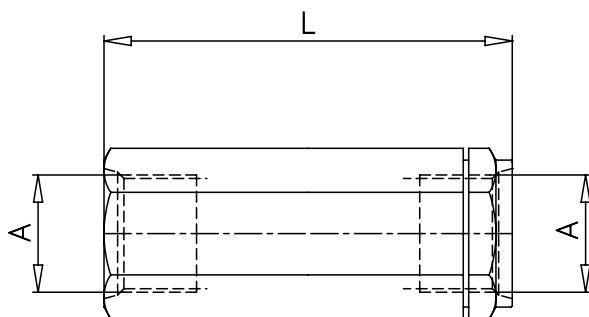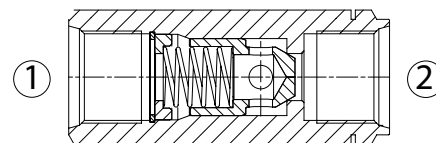

mm
(Inches)

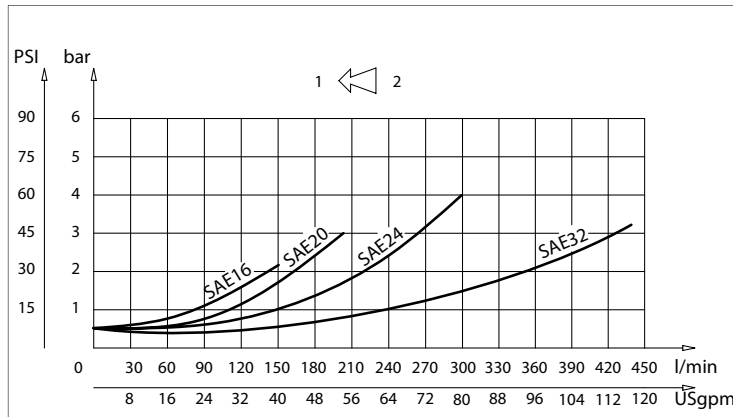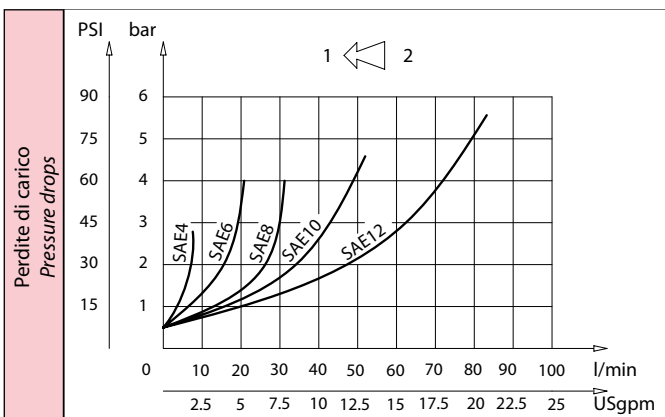

Caratteristiche tecniche Technical performances						
Codice Code	A	Portata Max Max flow l/min - USgpm	Pressione Max Max pressure bar/PSI	L	Ch	Peso approssimativo Approx weight Kg / lb
VUR 4 SAE	7/16 - 20 UNF	5 (1.3)	400 (5800)	55 (2.16)	19 (0.75)	0,05 (0.11)
VUR 6 SAE	9/16 - 18 UNF	15 (4)		58 (2.28)	19 (0.75)	0,10 (0.22)
VUR 8 SAE	3/4 - 16 UNF	30 (8)		69 (2.71)	24 (0.94)	0,18 (0.40)
VUR 10 SAE	7/8 - 14 UNF	50 (13)		75 (2.95)	27 (1.06)	0,31 (0.70)
VUR 12 SAE	1-1/16-12 UNF	90 (23)	350 (5000)	88,5 (3.48)	35 (1.38)	0,45 (1)
VUR 16 SAE	1-5/16-12 UNF	150 (40)		110 (4.33)	41 (1.61)	0,95 (2.1)
VUR 20 SAE	1-5/8-12 UNF	200 (50)		120 (4.72)	55 (2.16)	1,49 (3.30)
VUR 24 SAE	1-7/8-12 UNF	300 (80)		138 (5.43)	60 (2.36)	2,40 (5.30)
VUR 32 SAE	2-1/2-12 UNF	430 (110)			75 (2.97)	3 (6.60)

Codice ordinazione Ordering code			
VUR-X-SAE-Y-K			
X	Dimensione / Size	Y	Tenuta / Sealing
4	7/16 - 20 UNF	SP	Tenuta a cono Poppet sealing
6	9/16 - 18 UNF		
8	3/4 - 16 UNF		
10	7/8 - 14 UNF		
12	1-1/16-12 UNF	K	Molla / Spring
16	1-5/16-12 UNF		
20	1-5/8-12 UNF		
24	1-7/8-12 UNF		
32	2-1/2-12 UNF		
		1	1 bar Standard
		3	3 bar
		6	6 bar



LEHENGOTEK, S. A.