




# VURF



Valvole di controllo flusso unidirezionale  
Unidirectional flow control valves





**LEHENGOK, S. A.**



| Dati tecnici<br>Technical data              |                                                            |
|---------------------------------------------|------------------------------------------------------------|
| Viscosità fluido<br>Fluid viscosity         | 10-500 mm <sup>2</sup> /s<br>45 to 2000 ssu (6 to 420 cSt) |
| Classe di contaminazione<br>Filtration      | ISO code 16/13<br>SAE class 4 or better                    |
| Temperatura fluido<br>Fluid temperature     | -20°C +80°C<br>-4°F +176°F                                 |
| Temperatura ambiente<br>Ambient temperature | -20°C +50°C<br>-4°F +122°F                                 |

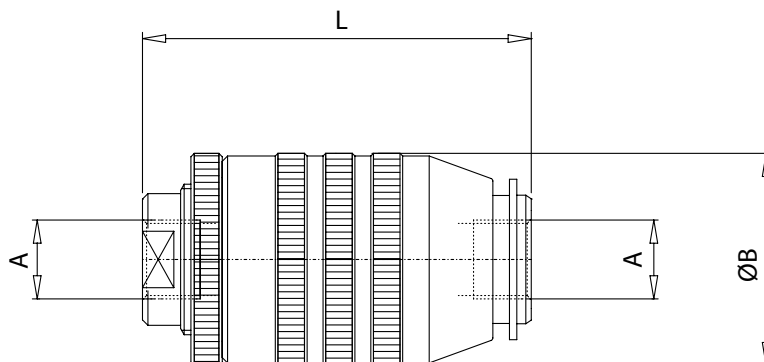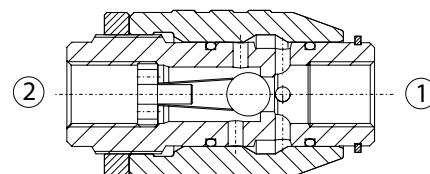

mm  
(Inches)

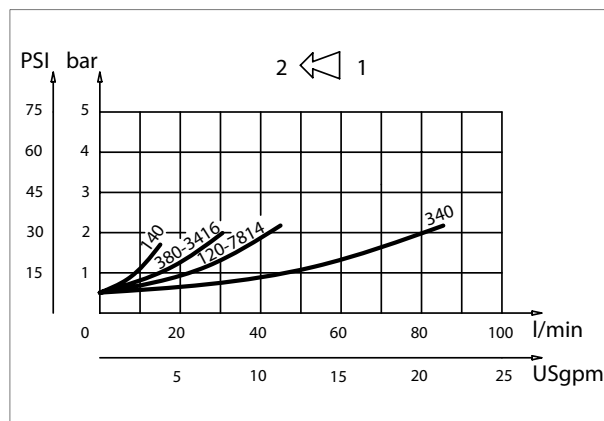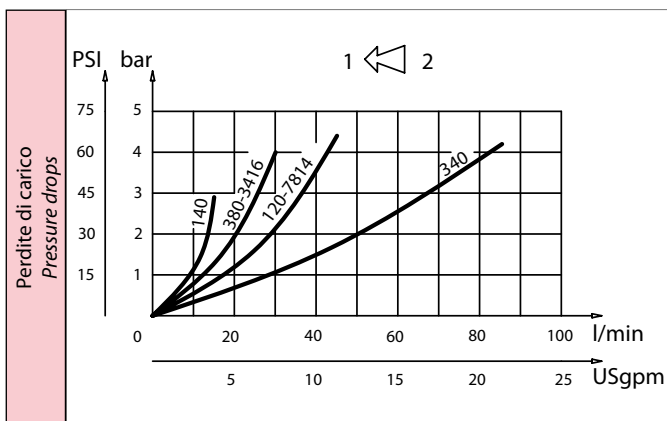

| Caratteristiche tecniche<br>Technical performances |              |                                          |                                          |           |              |                                                 |
|----------------------------------------------------|--------------|------------------------------------------|------------------------------------------|-----------|--------------|-------------------------------------------------|
| Codice<br>Code                                     | A            | Portata Max<br>Max flow<br>l/min - USgpm | Pressione Max<br>Max pressure<br>bar/PSI | B         | L            | Peso approssimativo<br>Approx weight<br>Kg / lb |
| VURF 140                                           | BSPP 1/4     | 15 (4)                                   | 350 (5000)                               | 34 (1.34) | 62 (2.44)    | 0,23 (0.50)                                     |
| VURF 380                                           | BSPP 3/8     | 30 (8)                                   |                                          | 39 (1.54) | 73 (2.87)    | 0,42 (0.93)                                     |
| VURF 120                                           | BSPP 1/2     | 45 (12)                                  |                                          | 44 (1.73) | 83 (3.27)    | 0,66 (1.45)                                     |
| VURF 340                                           | BSPP 3/4     | 85 (22)                                  | 300 (4350)                               | 54 (2.13) | 102 (4.02)   | 1,12 (2.5)                                      |
| VURF 100                                           | BSPP 1       | 150 (40)                                 | 250 (3600)                               | 65 (2.56) | 124,5 (4.90) | 1,6 (3.5)                                       |
| VURF 3416                                          | 3/4 - 16 UNF | 30 (8)                                   | 350 (5000)                               | 39 (1.54) | 73 (2.87)    | 0,42 (0.93)                                     |
| VURF 7814                                          | 7/8 - 14 UNF | 45 (12)                                  |                                          | 44 (1.73) | 83 (3.27)    | 0,66 (1.45)                                     |

| Codice ordinazione<br>Ordering code |                   |
|-------------------------------------|-------------------|
| VURF-X                              |                   |
| X                                   | Dimensione / Size |
| 140                                 | BSPP 1/4          |
| 380                                 | BSPP 3/8          |
| 120                                 | BSPP 1/2          |
| 340                                 | BSPP 3/4          |
| 100                                 | BSPP 1            |
| 3416                                | 3/4 - 16 UNF      |
| 7814                                | 7/8 - 14 UNF      |



**LEHENGOK, S. A.**