


**EN 1092-1 tipo 11 PN25/40**

PN	CÓDIGOS	TUBO			BRIDAS				CUELLO				Cara (Reborde)		Tornillos			aprox. Kg pieza
		DN	Medida	a	D	b	k	h	m	s	h2	r	g	f	no.	Métrica	L	
PN 40	FC114015	15	1/2"	21,3	95	16	65	38	32	2,0	6	4	45	2	4	M12	14	0,77
	FC114020	20	3/4"	26,9	105	18	75	40	40	2,3	6	4	58	2	4	M12	14	1,09
	FC114025	25	1"	33,7	115	18	85	40	46	2,6	6	4	68	2	4	M12	14	1,30
	FC114032	32	1 1/4"	42,4	140	18	100	42	56	2,6	6	6	78	2	4	M16	18	1,91
	FC114040	40	1 1/2"	48,3	150	18	110	45	64	2,6	7	6	88	3	4	M16	18	2,15
	FC114050	50	2"	60,3	165	20	125	48	75	2,9	8	6	102	3	4	M16	18	2,85
	FC114065	65	2 1/2"	76,1	185	22	145	52	90	2,9	10	6	122	3	8	M16	18	3,68
	FC114080	80	3"	88,9	200	24	160	58	105	3,2	12	8	138	3	8	M16	18	4,78
	FC114100	100	4"	114,3	235	24	190	65	134	3,6	12	8	162	3	8	M20	22	6,46
	FC114125	125	5"	139,7	270	26	220	68	162	4,0	12	8	188	3	8	M24	26	8,86
PN 25	FC114150	150	6"	168,3	300	28	250	75	192	4,5	12	10	218	3	8	M24	26	11,70
PN 40	FC112200	200	8"	219,1	360	30	310	80	244	6,3	16	10	278	3	12	M24	26	17,10
PN 40	FC114200	200	8"	219,1	375	34	320	88	244	6,3	16	10	285	3	12	M27	30	21,00
PN 25	FC112250	250	10"	273,0	425	32	370	88	298	7,1	18	12	335	3	12	M27	30	24,30
PN 40	FC114250	250	10"	273,0	450	38	385	105	306	7,1	18	12	345	3	12	M30	33	34,20
PN 25	FC112300	300	12"	323,9	485	34	430	92	352	8,0	18	12	395	4	16	M27	30	31,80
PN 40	FC114300	300	12"	323,9	515	42	450	115	362	8,0	18	12	410	4	16	M30	33	47,60
PN 25	FC112350	350	14"	355,6	555	38	490	100	398	8,0	20	12	450	4	16	M30	33	48,80
PN 40	FC114350	350	14"	355,6	580	46	510	125	408	8,8	20	12	465	4	16	M33	36	69,30
PN 25	FC112400	400	16"	406,4	620	40	550	110	452	8,8	20	12	505	4	16	M33	36	63,30
PN 40	FC114400	400	16"	406,4	660	50	585	135	462	11,0	20	12	535	4	16	M36	39	98,00
PN 25	FC112500	500	20"	508,0	730	48	660	125	558	10,0	20	12	615	4	20	M33	36	97,00
PN 40	FC114500	500	20"	508,0	755	57	670	140	562	14,2	20	12	615	4	20	M39	42	130,00

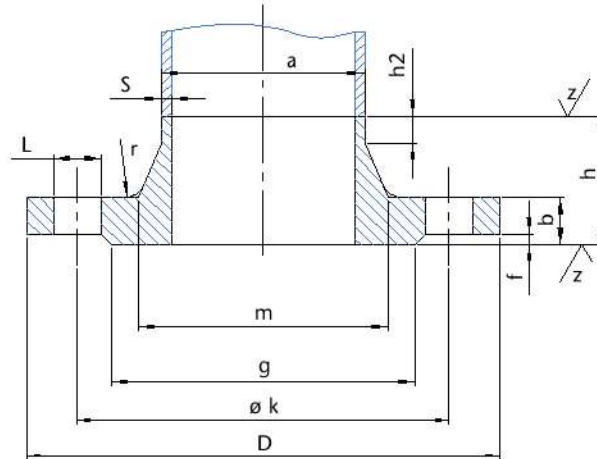