


Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

**Gerade  
Schottverschraubungen  
Bulkhead couplings  
Racores pasatabiques  
rectos**

**GSV-..L/S**

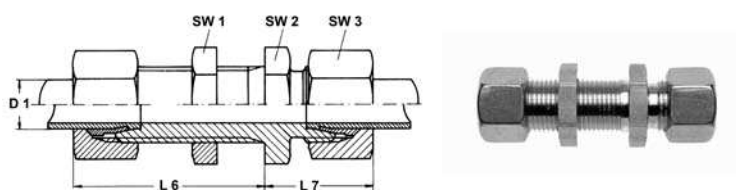

| Type    | Mat.-Nr.        | Serie | PN  | D1 | M      | L6   | L7   | SW1 | SW2 | SW3 | g/Stk |
|---------|-----------------|-------|-----|----|--------|------|------|-----|-----|-----|-------|
| GSV-06L | 708.1500.060.20 | L     | 315 | 6  | 12x1.5 | 42.0 | 22.0 | 17  | 17  | 14  | 62    |
| GSV-08L | 708.1500.080.20 | L     | 315 | 8  | 14x1.5 | 42.0 | 23.0 | 19  | 19  | 17  | 83    |
| GSV-10L | 708.1500.100.20 | L     | 315 | 10 | 16x1.5 | 43.0 | 25.0 | 22  | 22  | 19  | 108   |
| GSV-12L | 708.1500.120.20 | L     | 315 | 12 | 18x1.5 | 44.0 | 25.0 | 24  | 24  | 22  | 135   |
| GSV-15L | 708.1500.150.20 | L     | 315 | 15 | 22x1.5 | 46.0 | 27.0 | 30  | 27  | 27  | 230   |
| GSV-18L | 708.1500.180.20 | L     | 315 | 18 | 26x1.5 | 49.0 | 30.0 | 36  | 32  | 32  | 345   |
| GSV-22L | 708.1500.220.20 | L     | 160 | 22 | 30x2.0 | 51.0 | 33.0 | 41  | 36  | 36  | 435   |
| GSV-28L | 708.1500.280.20 | L     | 160 | 28 | 36x2.0 | 52.0 | 35.0 | 46  | 41  | 41  | 545   |
| GSV-35L | 708.1500.350.20 | L     | 160 | 35 | 45x2.0 | 58.0 | 40.0 | 55  | 50  | 50  | 874   |
| GSV-42L | 708.1500.420.20 | L     | 160 | 42 | 52x2.0 | 59.0 | 42.0 | 65  | 60  | 60  | 1275  |
| GSV-06S | 708.1500.060.30 | S     | 630 | 6  | 14x1.5 | 44.0 | 27.0 | 19  | 19  | 17  | 101   |
| GSV-08S | 708.1500.080.30 | S     | 630 | 8  | 16x1.5 | 44.0 | 28.0 | 22  | 22  | 19  | 132   |
| GSV-10S | 708.1500.100.30 | S     | 630 | 10 | 18x1.5 | 46.0 | 31.0 | 24  | 24  | 22  | 170   |
| GSV-12S | 708.1500.120.30 | S     | 630 | 12 | 20x1.5 | 47.0 | 31.0 | 27  | 24  | 24  | 215   |
| GSV-14S | 708.1500.140.30 | S     | 630 | 14 | 22x1.5 | 50.0 | 35.0 | 30  | 27  | 27  | 295   |
| GSV-16S | 708.1500.160.30 | S     | 400 | 16 | 24x1.5 | 50.0 | 35.0 | 32  | 32  | 30  | 345   |
| GSV-20S | 708.1500.200.30 | S     | 400 | 20 | 30x2.0 | 55.0 | 39.0 | 41  | 41  | 36  | 575   |
| GSV-25S | 708.1500.250.30 | S     | 400 | 25 | 36x2.0 | 59.0 | 44.0 | 46  | 46  | 46  | 949   |
| GSV-30S | 708.1500.300.30 | S     | 400 | 30 | 42x2.0 | 64.0 | 48.0 | 50  | 50  | 50  | 1120  |
| GSV-38S | 708.1500.380.30 | S     | 315 | 38 | 52x2.0 | 68.0 | 53.0 | 65  | 65  | 60  | 1693  |

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.



**LEHENGOTAK, S. A.**