

Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

Gerade Einschraubverschraubungen



Einschraubgewinde: NPT

Straight connectors, male

Stud thread: NPT

Racores para roscar rectos

Rosca de conexión: NPT



GEV-..S-NPT

Type	Mat.-Nr.	Serie	PN	D1	NPT	L1	L6	SW1	SW2	g/Stk
GEV-06SNPT 1.8	708.1102.100.30	S	630	6	1/8	36.0	21.0	14	17	45
GEV-06SNPT 1.4	708.1102.110.30	S	630	6	1/4	43.0	28.0	17	17	55
GEV-06SNPT 3.8	708.1102.120.30	S	630	6	3/8	43.0	28.0	19	17	70
GEV-06SNPT 1.2	708.1102.125.30	S	630	6	1/2	50.0	35.0	22	17	93
GEV-08SNPT 1.8	708.1102.160.30	S	630	8	1/8	38.0	23.0	17	17	48
GEV-08SNPT 1.4	708.1102.170.30	S	630	8	1/4	43.0	28.0	17	19	60
GEV-08SNPT 3.8	708.1102.180.30	S	630	8	3/8	43.0	28.0	19	19	74
GEV-08SNPT 1.2	708.1102.185.30	S	630	8	1/2	50.0	35.0	22	19	108
GEV-10SNPT 1.4	708.1102.270.30	S	630	10	1/4	43.5	27.5	19	22	71
GEV-10SNPT 3.8	708.1102.280.30	S	630	10	3/8	43.5	27.5	19	22	86
GEV-10SNPT 1.2	708.1102.285.30	S	630	10	1/2	50.0	34.5	22	22	104
GEV-10SNPT 3.4	708.1102.290.30	S	630	10	3/4	50.5	34.5	27	22	154
GEV-12SNPT 1.4	708.1102.380.30	S	630	12	1/4	45.5	29.5	22	24	96
GEV-12SNPT 3.8	708.1102.390.30	S	630	12	3/8	45.5	29.5	22	24	100
GEV-12SNPT 1.2	708.1102.400.30	S	630	12	1/2	50.5	34.5	22	24	121
GEV-12SNPT 3.4	708.1102.405.30	S	630	12	3/4	50.5	34.5	27	24	170
GEV-14SNPT 3.8	708.1102.502.30	S	630	14	3/8	49.0	31.0	24	27	125
GEV-14SNPT 1.2	708.1102.504.30	S	630	14	1/2	54.0	36.0	24	27	160
GEV-14SNPT 3.4	708.1102.506.30	S	630	14	3/4	54.0	36.0	27	27	180
GEV-14SNPT 1.1	708.1102.510.30	S	630	14	1	61.0	43.0	36	27	230
GEV-16SNPT 3.8	708.1102.564.30	S	400	16	3/8	49.0	30.5	27	30	152
GEV-16SNPT 1.2	708.1102.566.30	S	400	16	1/2	54.0	35.5	27	30	170
GEV-16SNPT 3.4	708.1102.568.30	S	400	16	3/4	54.0	35.0	27	30	196
GEV-16SNPT 1.1	708.1102.570.30	S	400	16	1	61.0	42.5	36	30	324
GEV-20SNPT 1.2	708.1102.706.30	S	400	20	1/2	59.0	37.5	32	36	246
GEV-20SNPT 3.4	708.1102.708.30	S	400	20	3/4	59.0	37.5	32	36	268
GEV-20SNPT 1.1	708.1102.712.30	S	400	20	1	64.0	42.5	36	36	360
GEV-25SNPT 1.2	708.1102.800.30	S	400	25	1/2	64.0	40.0	41	46	421
GEV-25SNPT 3.4	708.1102.805.30	S	400	25	3/4	64.0	40.0	41	46	474
GEV-25SNPT 1.1	708.1102.810.30	S	400	25	1	69.0	45.0	41	46	503
GEV-25SNPT 5.4	708.1102.815.30	S	400	25	1 1/4	70.0	46.0	46	46	654
GEV-25SNPT 3.2	708.1102.820.30	S	400	25	1 1/2	70.0	46.0	50	46	
GEV-30SNPT 3.4	708.1102.895.30	S	400	30	3/4	67.0	40.5	46	50	536
GEV-30SNPT 1.1	708.1102.900.30	S	400	30	1	72.0	45.5	46	50	590
GEV-30SNPT 5.4	708.1102.902.30	S	400	30	1 1/4	73.0	46.5	46	50	650
GEV-30SNPT 3.2	708.1102.905.30	S	400	30	1 1/2	73.0	46.5	50	50	786
GEV-38SNPT 1.1	708.1102.960.30	S	315	38	1	79.0	48.0	55	60	955
GEV-38SNPT 5.4	708.1102.954.30	S	315	38	1 1/4	80.0	49.0	55	60	955
GEV-38SNPT 3.2	708.1102.953.30	S	315	38	1 1/2	80.0	49.0	55	60	935

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.



LEHENGOMAK, S. A.

Schneidringverschraubung Cutting Ring Fitting

Racor de anillo cortante

Gerade Einschraubverschraubungen


Einschraubgewinde: Metrisches Gewinde - kegelig

Straight connectors, male

Stud thread: metric - taper

Racores para roscar rectos

Rosca de conexión: Rosca métrica - cónica

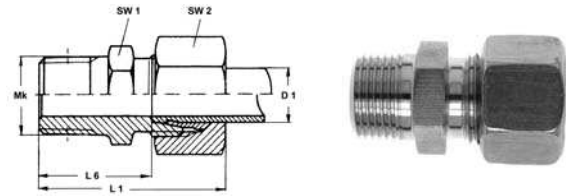

GEV-..LMK

Type	Mat.-Nr.	Serie	PN	D1	Mk	L1	L6	SW1	SW2	g/Stk
● GEV-04LLMK 08x1,0	708.1103.090.10	LL	100	4	08x1.0	25.5	16.0	10	10	12
● GEV-06LLMK 10x1,0	708.1103.180.10	LL	100	6	10x1.0	26.0	14.5	11	12	15
● GEV-08LLMK 10x1,0	708.1103.230.10	LL	100	8	10x1.0	28.0	16.5	12	14	18
● GEV-06LMK 10x1,0	708.1103.180.20	L	315	6	10x1.0	30.5	16.0	14	14	27
● GEV-06LMK 12x1,5	708.1103.195.20	L	315	6	12x1.5	34.5	20.0	14	14	31
● GEV-08LMK 12x1,5	708.1103.240.20	L	315	8	12x1.5	35.0	20.0	14	17	33
● GEV-08LMK 14x1.5	708.1103.245.20	L	315	8	14x1.5	35.0	20.0	17	17	40
● GEV-10LMK 14x1,5	708.1103.280.20	L	315	10	14x1.5	36.0	21.0	17	19	47
● GEV-10LMK 16x1,5	708.1103.285.20	L	315	10	16x1.5	36.0	21.0	17	19	57
● GEV-12LMK 16x1,5	708.1103.330.20	L	315	12	16x1.5	37.0	22.0	19	22	62
● GEV-12LMK 18x1,5	708.1103.333.20	L	315	12	18x1.5	39.0	22.0	19	22	80
● GEV-15LMK 18x1,5	708.1103.390.20	L	315	15	18x1.5	40.0	23.0	24	27	105
● GEV-18LMK 22x1,5	708.1103.460.20	L	315	18	22x1.5	42.0	25.5	27	32	145

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.



LEHENGOTAK, S. A.