

Winkel-Einschraubverschraubungen


Einschraubgewinde: NPT

Elbows, male

Stud thread: NPT

Racores para roscar en codo

Rosca de conexión: NPT

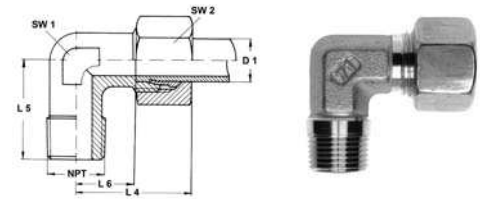

WEV-..S-NPT

Type	Mat.-Nr.	Serie	PN	D1	NPT	L4	L5	L6	SW1	SW2	g/Stk
WEV-06SNPT 1.4	708.2402.110.30	S	630	6	1/4	31.0	26.0	16.0	12	17	71
WEV-06SNPT 3.8	708.2402.120.30	S	630	6	3/8	31.0	28.0	16.0	14	17	82
WEV-06SNPT 1.2	708.2402.125.30	S	630	6	1/2	31.0	33.0	16.0	17	17	99
WEV-08SNPT 1.4	708.2402.170.30	S	630	8	1/4	32.0	27.0	17.0	14	19	99
WEV-08SNPT 3.8	708.2402.180.30	S	630	8	3/8	32.0	28.0	17.0	14	19	107
WEV-08SNPT 1.2	708.2402.185.30	S	630	8	1/2	32.0	33.0	17.0	17	19	133
WEV-10SNPT 1.4	708.2402.270.30	S	630	10	1/4	34.0	27.0	17.5	17	22	137
WEV-10SNPT 3.8	708.2402.280.30	S	630	10	3/8	34.0	28.0	17.5	17	22	149
WEV-12SNPT 1.4	708.2402.380.30	S	630	12	1/4	34.0	27.0	21.5	17	24	166
WEV-12SNPT 3.8	708.2402.390.30	S	630	12	3/8	38.0	28.0	21.5	17	24	173
WEV-12SNPT 1.2	708.2402.400.30	S	630	12	1/2	38.0	33.0	21.5	17	24	197
WEV-14SNPT 3.8	708.2402.502.30	S	630	14	3/8	40.0	28.0	22.0	19	27	169
WEV-14SNPT 1.2	708.2402.504.30	S	630	14	1/2	40.0	34.0	22.0	19	27	175
WEV-16SNPT 1.2	708.2402.655.30	S	400	16	1/2	43.0	36.0	24.5	24	30	198
WEV-20SNPT 3.4	708.2402.708.30	S	400	20	3/4	48.0	42.0	26.5	27	36	311
WEV-25SNPT 1.1	708.2402.810.30	S	400	25	1	54.0	48.0	30.0	36	46	570
WEV-30SNPT 5.4	708.2402.902.30	S	400	30	1 1/4	62.0	57.0	35.5	41	50	829
WEV-38SNPT 3.2	708.2402.953.30	S	315	38	1 1/2	72.0	61.0	41.0	50	60	1175

Baumaße sind Ungefährmaße bei angezogener Überwurfmutter.

Sizes are approximate dimensions at tightened nut.

Las medidas son aproximadas con la tuerca de unión apretada.